

# Ergodic Capacity Analysis of AF DH MIMO Relay Systems with Residual Transceiver Hardware Impairments: Conventional and Large System Limits

Anastasios K. Papazafeiropoulos\*, Shree Krishna Sharma†, Symeon Chatzinotas†, and Björn Ottersten†

\*Institute for Digital Communications, University of Edinburgh, Edinburgh, U.K.

†SnT - securityandtrust.lu, University of Luxembourg, Luxembourg

Email: a.papazafeiropoulos@ed.ac.uk, {shree.sharma, symeon.chatzinotas,bjorn.ottersten}@uni.lu

**Abstract**—Despite the inevitable presence of transceiver impairments, most prior work on multiple-input multiple-output (MIMO) wireless systems assumes perfect transceiver hardware which is unrealistic in practice. In this direction, motivated by the increasing interest in MIMO relay systems due to their improved spectral efficiency and coverage, this paper investigates the impact of residual hardware impairments on the ergodic capacity of dual-hop (DH) amplify-and-forward (AF) MIMO relay systems. Specifically, a thorough characterization of the ergodic channel capacity of DH AF relay systems in the presence of hardware impairments is presented herein for both the finite and large antenna regimes by employing results from finite-dimensional and large random matrix theory, respectively. Regarding the former setting, we derive the exact ergodic capacity as well as closed-form expressions for tight upper and lower bounds. Furthermore, we provide an insightful study for the low signal-to-noise ratio (SNR) regimes. Next, the application of the free probability (FP) theory allows us to study the effects of the hardware impairments in future 5G deployments including a large number of antennas. While these results are obtained for the large system limit, simulations show that the asymptotic results are quite precise even for conventional system dimensions.

## I. INTRODUCTION

The continuous evolution of cellular networks is led by the rapidly increasing demand for ubiquitous wireless connectivity and spectral efficiency [2]. Initially, multiple-input multiple-output (MIMO) technology emerged by means of the pioneering works of Telatar and Foschini [3], [4] as an enabling technique to implement high data-rate systems based on their impressive capacity scaling in the high signal-to-noise ratio (SNR) regime with the minimum of transmit and receive antennas. In order to characterize such a MIMO wireless link, an information-theoretic capacity has been commonly used as an important figure of merit.

Copyright (c) 2015 IEEE. Personal use of this material is permitted. However, permission to use this material for any other purposes must be obtained from the IEEE by sending a request to [pubs-permissions@ieee.org](mailto:pubs-permissions@ieee.org).

The work of S. Sharma, S. Chatzinotas, and B. Ottersten was partially supported by the projects H2020 SANSA and FNR SATSENT, SEMIGOD, INWIPNET, PROSAT. Also, this work was partially supported by a Marie Curie Intra European Fellowship within the 7th European Community Framework Programme for Research of the European Commission under grant agreement no. [330806], IAWICOM.

Parts of this work were presented at the IEEE Global Communications Conference (GLOBECOM 2015) [1].

Following this direction, the massive MIMO paradigm, originating from [5], is a new network architecture, and is also known as large-scale antenna systems or very large MIMO. In this paradigm, the number of antennas of each base station (BS) and the number of users per BS are unconventionally large but they differ by a factor of two or four or even an order of the magnitude. Interestingly, this technology brings numerous advantages such as unprecedented spatial degrees-of-freedom enabling large capacity gains from coherent reception/transmit beamforming, resilience to intra-user interference and thermal noise, and the ease of implementation because of low-complexity signal processing algorithms [6], [7].

The massive MIMO wireless systems are attractive (cost-efficient) for a network deployment, but only if the antenna elements consist of inexpensive hardware components. However, most of the research contributions are based on the strong assumption of the perfect hardware and this assumption is quite idealistic in practice. In reality, besides the effect of wireless fading channel, both the transmitted and received baseband signals are also affected by the unavoidable imperfections of the transceiver hardware components. In fact, the lower the quality of the transceiver hardware, the higher the impact of occurring impairments on the performance of the system. Specifically, several phenomena exist that constitute additive or multiplicative hardware impairments e.g., in-phase/quadrature-phase (I/Q)-imbalance [8], high power amplifier non-linearities [9], and oscillator phase noise (PN) [10]. Even though the performance degradation caused due to such hardware impairments can be partially mitigated by means of suitable calibration schemes at the transmitter or compensation algorithms at the receiver, there still remains a certain amount of unaccounted distortion caused due to residual hardware impairments. The main reasons for these residual impairments are imperfect parameters estimation due to the randomness and the time variation of the hardware characteristics, inaccurate models because of the limited precision, unsophisticated compensation algorithms, etc [11]. The system model, including the additive hardware impairments, has been proposed in [11]–[15], in order to describe the aggregate effect from many impairments. These impairments are modeled as independent additive distortion noises at the BS as well as at the user. The adoption of this

model herein is based on its analytical tractability and the experimental verifications in [15]. On the other hand, there are hardware impairments multiplied with the channel vector, which might cause channel attenuations and phase shifts. In the case of slow variation of these impairments, they can be characterized as sufficiently static, and thus, can be included in the channel vector by an appropriate scaling of its covariance matrix or due to the property of circular symmetry of the channel distribution. However, if the impairment such as the phase noise accumulates within the channel coherence period, it causes a multiplicative distortion that cannot be incorporated by the channel vector [10], [12], [13].

Recently, the topic concerning the investigation of the impact of radio-frequency (RF) impairments on wireless communication systems has attracted a tremendous amount of attention with a growing interest in the direction of the study of their effects on conventional MIMO systems (see [8]–[10], [14]–[18] and the references therein) and, more lately, on large MIMO systems [11]–[13], [19]–[21]. For instance, experimental results modeling the residual hardware impairments only at the transmitter and the study of their impacts on certain MIMO detectors such as zero-forcing took place in [15]. More interestingly, regarding the channel capacity, [18] elaborated on the derivation of high signal-to-noise ratio (SNR) bounds by considering only transmitter impairments for MIMO systems with a finite number of antennas, while in [11], the authors extended the analysis to arbitrary SNR values, but most importantly, by including receiver impairments. Unfortunately, the imposed fundamental capacity ceiling resulted due to the presence of the impairments becomes more restrictive in higher rate systems such as large MIMO systems in which increasing the transmit power cannot be any more beneficial. In addition, the authors in [11]–[13], [18], [22] showed that the transceiver hardware impairments result in a channel estimation error and a capacity ceiling even for the case of massive MIMO systems.

Despite that relay systems have received important research attention since they realize the performance gains of wireless systems cost-efficiently by means of coverage extension and uniform quality of service, only a few works have tackled the effect of hardware impairments [22]–[25]. In particular, dual hop (DH) amplify-and-forward (AF) relay systems have been extensively studied for the cases of both conventional and large MIMO systems [26]–[28], but the relevant studies of the relay systems considering the effects of hardware impairments are quite limited in the literature. Actually, the authors in [22], [24] provided the most noteworthy works by considering these kinds of impairments in one-way and two-way DH AF relaying systems, respectively. In particular, they considered only the outage probability and simple capacity upper bounds for the simplistic case of single antenna systems. However, a thorough analysis of the capacity of the relay systems with hardware impairments for the case of multiple antennas is still lacking from the literature. Given the importance of relay systems, their importance in future 5G (fifth generation) deployments is undeniable. Specifically, relay systems are going to be employed in 5G systems by considering a large number of antennas at each node. Furthermore, their application in heterogeneous networks (HetNets) is unquestionable. Please note also that

massive MIMO and HetNets can be combined, which makes the study of large MIMO relay systems very contributory [29], [30]. To this end, this work focuses on the effect of additive transceiver impairments on the ergodic capacity of the DH AF MIMO relay systems and the performance characterization due to multiplicative impairments is the subject of the future work.

In this paper, we acknowledge that the manifestation of RF impairments becomes more significant in high data-rates systems such as MIMO or more strikingly, in the future large MIMO systems which offer a higher capacity. Nevertheless, taking into account that the deployments of both relays and a large number of antennas in a massive MIMO system are desirable to be cost-efficient, the transceiver components should be inexpensive (low quality), which makes the overall system performance more prone to impairments. In this context, the authors in [25] recently studied the impact of transceiver impairments on massive MIMO relaying systems but the work focused only on the large-antenna regime considering decode and forward (DF) relaying policy. To the best of our knowledge, there appear to be no analytical ergodic capacity results applied to DH AF MIMO systems with an arbitrary number of antennas and the relaying configurations in the presence of hardware impairments. Only SISO works had been studied. Note that AF systems are preferable with comparison to DF from the aspect of the ease of implementation, which is crucial in the design of 5G systems demanding dense HetNets and low cost manufacture. As a result, it is of great interest and necessity to investigate the impact of residual additive hardware impairments on DH AF relay systems with both finite and infinite number of antennas by providing a detailed performance analysis. Especially, unlike [22] which only deals with single antenna relay systems, this work provides a complete performance characterization by investigating the impact of transceiver impairments on the ergodic capacity of DF AF MIMO relay systems for both conventional (finite) and large system (infinite number of antennas) regimes. Especially, it might be the first work presenting together finite and asymptotic results bridging the gap between the two analyses and offering and extra validation. None work till now has considered the hardware impairments in DH AF relay channels with large MIMO or even conventional MIMO systems. Moreover, we provide an exact theoretical expression for the ergodic capacity of the considered system instead of only the bounds. In this direction, the contributions of this paper can be summarized as follows

- Given an ideal AF MIMO dual-hop system model, where multiple single-antenna users (source) communicate with a BS (destination) through a relay without the source to destination link, we introduce a realistic model for MIMO relay systems incorporating the inevitable residual additive hardware transceiver impairments by taking into account the generalized model of [14], [15], [22]. In fact, contrary to the existing works which studied the performance degradation due to separate single sources [8], [14], we follow an overall approach of examining the accumulated impact of the additive hardware impairments.
- Based on the aforementioned system model and employing

results from [26], we investigate the impact of RF hardware impairments on the ergodic channel capacity when both the relay and the BS are deployed with a finite number of antennas. Notably, we show that a saturation of the ergodic capacity, appearing at high SNR due to additive hardware impairments, takes also place in DH-AF relay MIMO channels. In particular, the study takes place by means of derivation of a new exact analytical result, simple closed-form low-SNR expressions, and the closed-form tight upper and lower bounds on the ergodic capacity in terms of easily computed standard functions, which provide insightful outcomes regarding the characterization of the degrading effects due to the residual hardware imperfections.

- Using tools from large random matrix theory (RMT) and contrary to the existing literature that usually employs a deterministic equivalent analysis, we follow a different line of realizing mathematical derivations by pursuing a free probability (FP) analysis [31]. Advantageously, the FP requires just a polynomial solution instead of fixed-point equations and allows us to provide a thorough characterization of the impact of residual transceiver impairments on the capacity of DH AF systems in the large system limit. One of the most interesting outcomes of the paper is the demonstration that the results coming from both conventional and large-antenna analyses coincide for the conventional number of antennas.

The remainder of this paper is structured as follows: Section II presents the signal and system models for relay systems with multiple antennas for the cases of both ideal and imperfect hardware. In Section III, we pursue a complete conventional random matrix theory analysis for DH AF MIMO channels by means of a new analytical result for the ergodic capacity, simple closed-form low-SNR expressions, and the closed-form tight upper and lower bounds in the presence of hardware impairments. Covering the need for the investigation of the ergodic capacity in the case of large MIMO systems, we employ a FP analysis in Section IV. The numerical results are placed in Section V, while Section VI summarizes the paper.

*Notation:* Vectors and matrices are denoted by boldface lower and upper case symbols.  $(\cdot)^T$ ,  $(\cdot)^H$ , and  $\text{tr}(\cdot)$  represent the transpose, Hermitian transpose, and trace operators, respectively. The expectation operator, as well as the adjugate and the determinant of a matrix are denoted by  $\mathbb{E}[\cdot]$ , as well as  $\text{adj}(\cdot)$  and  $\det(\cdot)$ , respectively. The  $\text{diag}\{\cdot\}$  operator generates a diagonal matrix from a given vector, and the symbol  $\triangleq$  declares definition. The notations  $\mathcal{C}^M$  and  $\mathcal{C}^{M \times N}$  refer to complex  $M$ -dimensional vectors and  $M \times N$  matrices, respectively. Finally,  $\mathbf{b} \sim \mathcal{CN}(\mathbf{0}, \boldsymbol{\Sigma})$  denotes a circularly symmetric complex Gaussian with zero-mean and covariance matrix  $\boldsymbol{\Sigma}$ , and  $(\cdot)^+$  signifies the positive part of its argument. Note that  $E_l(\cdot)$  is the exponential integral function of order  $l$  [32, Eq. 8.211.1],  $K_v(\cdot)$  is the modified Bessel function of the second kind [32, Eq. 8.432.6],  $U(a, b, z)$  is the Tricomi confluent hypergeometric function [33, Eq. 07.33.02.0001.01]], and  $W_{\lambda, \mu}(\cdot)$  is the Whittaker function [34, Eq. 13.1.33].

## II. SYSTEM MODEL

We consider a DH AF relay system with ideal transceiver hardware as illustrated in Fig. 1(a). We assign the subscript 1 for the parameters between the source and the relay, and the subscript 2 for the parameters describing the second hop, i.e., the link between the relay and the destination. While our analysis concerning a DH AF system comprised by three nodes (the source, a relay, and the destination) with multiple number of antennas is rather general, we exemplify a scenario of practical interest without loss of any generality. Specifically, we assume that both the relay and the BS (destination) are compact infrastructures with multiple antennas, but regarding the source node, we assume that it consists of a number of single-antenna users playing the same role as a single compact node with an equivalent number of antennas<sup>1</sup>. Hence,  $K$  single antenna non-cooperative users, trying to reach a distant  $N$ -antennas BS, communicate first with an intermediate relay including an array of  $M$  antennas (first hop). In other words, a single-input multiple-output (SIMO) multiple access channel (MAC) (users-relay) is followed by a point to point MIMO channel (relay-BS). The BS is assumed to be aware of the total system channel state information (CSI)<sup>2</sup>, while both the users and the relay have no CSI knowledge during their transmissions.

The mathematical representation of this model is expressed as

$$\mathbf{y}_1 = \mathbf{H}_1 \mathbf{x}_1 + \mathbf{z}_1, \quad (1)$$

$$\begin{aligned} \mathbf{y}_2 &= \mathbf{H}_2 \sqrt{\nu} \mathbf{y}_1 + \mathbf{z}_2 \\ &= \sqrt{\nu} \mathbf{H}_2 \mathbf{H}_1 \mathbf{x}_1 + \sqrt{\nu} \mathbf{H}_2 \mathbf{z}_1 + \mathbf{z}_2, \end{aligned} \quad (2)$$

where the first and second equations correspond to the first (users-relay) and second (relay-BS) input-output signal models, respectively. In particular,  $\mathbf{x}_1 \in \mathcal{C}^{K \times 1}$  is the Gaussian vector of symbols simultaneously transmitted by the  $K$  users with  $\mathbb{E}[\mathbf{x}_1 \mathbf{x}_1^H] = \mathbf{Q}_1 = \mu \mathbf{I}_K$  with  $\mu = \frac{\rho}{K}$ , where  $\rho$  is the system power.  $\mathbf{H}_1 \in \mathcal{C}^{M \times K} \sim \mathcal{CN}(\mathbf{0}, \mathbf{I}_M \otimes \mathbf{I}_K)$  is the concatenated channel matrix between the  $K$  users and the relay exhibiting flat-fading, while  $\mathbf{H}_2 \in \mathcal{C}^{N \times M} \sim \mathcal{CN}(\mathbf{0}, \mathbf{I}_N \otimes \mathbf{I}_M)$  describes the channel matrix between the relay and the BS. In other words, both the first and second hops exhibit Rayleigh fast-fading and are expressed by Gaussian matrices with independent identically distributed (i.i.d.) complex circularly symmetric elements. In addition,  $\mathbf{y}_1$  and  $\mathbf{y}_2$  as well as  $\mathbf{z}_1 \sim \mathcal{CN}(\mathbf{0}, \mathbf{I}_M)$  and  $\mathbf{z}_2 \sim \mathcal{CN}(\mathbf{0}, \mathbf{I}_N)$  denote the received signals as well as the additive white Gaussian noise (AWGN) vectors at the relay and BS, respectively, i.e., the user signal-to-noise-ratio (SNR) equals to  $\mu$ . Note that before forwarding the received signal  $\mathbf{y}_1$  at the relay, we consider that it is amplified by  $\nu = \frac{\alpha}{M(1+\rho)}$ , where we have placed a per relay-antenna fixed power constraint  $\frac{\alpha}{M}$  with  $\alpha$  being the total gain of the relay, i.e.,  $\mathbb{E}[\|\sqrt{\nu} \mathbf{y}_1\|^2] \leq \alpha$ , with the expectation taken over signal, noise, and channel fading realizations. For the performance characterization in this paper, we assume a fixed relay gain.

In practice, the transmitter, the relay, and the BS are affected by certain inevitable additive impairments such as

<sup>1</sup>This example assumes that the users are in close proximity, in order to realize the same channel as a multi-antenna source.

<sup>2</sup>The effect of imperfect CSI will be taken into account for future work.

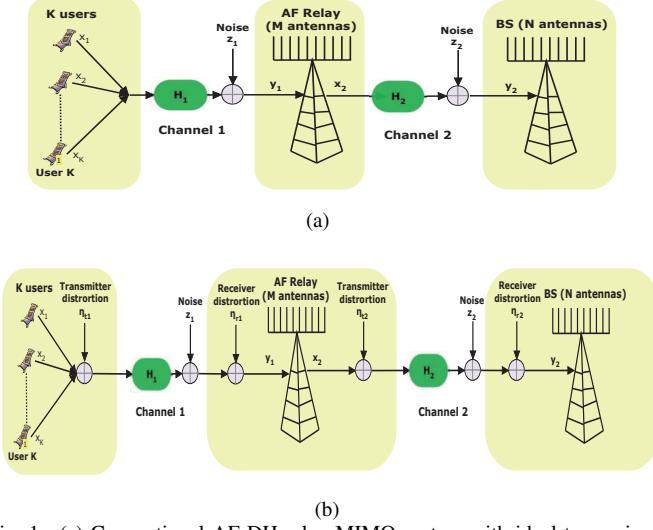


Fig. 1. (a) Conventional AF DH relay MIMO system with ideal transceiver hardware. (b) Generalized AF DH relay MIMO system with residual additive transmitter and receiver hardware impairments.

I/Q imbalance [14]. Although mitigation schemes can be incorporated in both the transmitter and receiver, residual impairments still emerge by means of additive distortion noises [14], [15]. In our system model, an important attention should be given to the relay which plays two distinctive roles. In the first hop, it operates as a receiver, while it becomes the transmitter of the second hop. Taking this into consideration, in each node of the system, a transmit and/or receive impairment exists which may cause a mismatch between the intended signal and what is actually transmitted during the transmit processing and/or a distortion of the received signal at the destination.

Introduction of the residual additive transceiver impairments to (1) and (2) provides the following general channel models for the respective links<sup>3</sup>

$$\mathbf{y}_1 = \mathbf{H}_1(\mathbf{x}_1 + \boldsymbol{\eta}_{t1}) + \boldsymbol{\eta}_{r1} + \mathbf{z}_1, \quad (3)$$

$$\begin{aligned} \mathbf{y}_2 &= \mathbf{H}_2(\sqrt{\nu}\mathbf{y}_1 + \boldsymbol{\eta}_{t2}) + \boldsymbol{\eta}_{r2} + \mathbf{z}_2 \\ &= \sqrt{\nu}\mathbf{H}_2\mathbf{H}_1(\mathbf{x}_1 + \boldsymbol{\eta}_{t1}) + \mathbf{H}_2(\sqrt{\nu}(\boldsymbol{\eta}_{r1} + \mathbf{z}_1) + \boldsymbol{\eta}_{t2}) + \boldsymbol{\eta}_{r2} + \mathbf{z}_2, \end{aligned} \quad (4)$$

where the additive terms  $\boldsymbol{\eta}_{ti}$  and  $\boldsymbol{\eta}_{ri}$  for  $i = 1, 2$  are the distortion noises coming from the residual impairments in the transmitter and receiver of the link  $i$ , respectively. Interestingly, this model (depicted in Fig. 1(b)) allows us to investigate the impact of the additive residual transceiver impairments, described in [14], [15], on a DH AF system. Generally, the transmitter and the receiver distortion noises for the  $i$ th link are modeled as Gaussian distributed, where their average power is proportional to the average signal power, as shown by measurement results [15]. Mathematically speaking, we have

$$\boldsymbol{\eta}_{ti} \sim \mathcal{CN}(\mathbf{0}, \delta_{ti}^2 \text{diag}(q_{i1}, \dots, q_{iT_i})), \quad (5)$$

$$\boldsymbol{\eta}_{ri} \sim \mathcal{CN}(\mathbf{0}, \delta_{ri}^2 \text{tr}(\mathbf{Q}_i) \mathbf{I}_{R_i}), \quad (6)$$

with  $T_i$  and  $R_i$  being the numbers of transmit and receive antennas of link  $i$ , i.e.,  $T_1 = K$ ,  $T_2 = M$  and  $R_1 =$

<sup>3</sup>The same model has been used in [35] for the investigation of the residual additive transceiver hardware impairments on the minimum mean square error (MMSE) filtering performance of a DH-AF (MIMO) wireless system in the large number of antennas regime.

$M$ ,  $R_2 = N$ , while  $\mathbf{Q}_i$  is the transmit covariance matrix of the corresponding link with diagonal elements  $q_{i1}, \dots, q_{iT_i}$ . Note that the circularly-symmetric complex Gaussianity can be justified by the aggregate contribution of many impairments. Moreover,  $\delta_{ti}^2$  and  $\delta_{ri}^2$  are proportionality parameters describing the severity of the residual impairments in the transmitter and the receiver of link  $i$ . In practical applications, these parameters appear as the error vector magnitudes (EVM) at each transceiver side [2]. Obviously, as far as the first hop is concerned, the additive transceiver impairments are expressed as

$$\boldsymbol{\eta}_{t1} \sim \mathcal{CN}(\mathbf{0}, \delta_{t1}^2 \mu \mathbf{I}_K), \quad (7)$$

$$\boldsymbol{\eta}_{r1} \sim \mathcal{CN}(\mathbf{0}, \delta_{r1}^2 \rho \mathbf{I}_M). \quad (8)$$

Given that the input signal for the second hop is  $\sqrt{\nu}\mathbf{y}_i$ , the corresponding input covariance matrix is

$$\begin{aligned} \mathbf{Q}_2 &= \nu \mathbb{E}[\mathbf{y}_1 \mathbf{y}_1^H] = \nu K \left( \mu + \delta_{t1}^2 \mu + \delta_{r1}^2 \mu + \frac{1}{K} \right) \mathbf{I}_M \\ &= \tilde{\mu} \nu K \mathbf{I}_M, \end{aligned} \quad (9)$$

where  $\tilde{\mu} = (\mu + \delta_{t1}^2 \mu + \delta_{r1}^2 \mu + \frac{1}{K})$ . Note that now,  $\nu = \frac{\alpha}{KM\tilde{\mu}}$ , after accounting for fixed gain relaying. Thus, the additive transceiver impairments for the second hop take the form<sup>4</sup>

$$\boldsymbol{\eta}_{t2} \sim \mathcal{CN}(\mathbf{0}, \delta_{t2}^2 \tilde{\mu} \nu K \mathbf{I}_M), \quad (10)$$

$$\boldsymbol{\eta}_{r2} \sim \mathcal{CN}(\mathbf{0}, \delta_{r2}^2 \tilde{\mu} \nu K M \mathbf{I}_N). \quad (11)$$

In particular, taking (4) into consideration, the capacity of the considered channel model is described by the following proposition.

*Proposition 1:* The ergodic capacity of a DH AF system in the presence of i.i.d. Rayleigh fading with residual additive transceiver hardware impairments under per user power constraints  $[\mathbf{Q}_1]_{k,k} \leq \mu, \forall k = 1 \dots K$  and (9) is given by

$$C = \mathbb{E} \left[ \ln \det \left( \mathbf{I}_N + \frac{\mu \nu}{B} \mathbf{H}_2 \mathbf{H}_1 \mathbf{H}_1^H \mathbf{H}_2^H \boldsymbol{\Phi}^{-1} \right) \right] \quad (12)$$

$$= \underbrace{\mathbb{E} \left[ \ln \det \left( \boldsymbol{\Phi} + \frac{\mu \nu}{B} \mathbf{H}_2 \mathbf{H}_1 \mathbf{H}_1^H \bar{\mathbf{H}}_2^H \right) \right]}_{C_1} - \underbrace{\mathbb{E} [\ln \det(\boldsymbol{\Phi})]}_{C_2}, \quad (13)$$

where  $\boldsymbol{\Phi} = f_2 \mathbf{H}_2 \mathbf{H}_1 \mathbf{H}_1^H \mathbf{H}_2^H + f_3 \mathbf{H}_2 \mathbf{H}_2^H + \mathbf{I}_N$  with  $B = \delta_{t2}^2 \tilde{\mu} \nu K M + 1$ ,  $f_1 = \tilde{f}_1 f_3$ ,  $f_2 = f_4 \delta_{t1}^2$ ,  $f_3 = \frac{\nu(\delta_{t2}^2 \tilde{\mu} K + \delta_{r1}^2 \mu K + 1)}{B}$ ,  $f_4 = \frac{\mu \nu}{B}$ , and  $\tilde{f}_1 = \frac{f_2 + f_4}{f_3}$ .

*Proof:* Given any channel realizations  $\mathbf{H}_1, \mathbf{H}_2$  and transmit signal covariance matrices  $\mathbf{Q}_1$  and  $\mathbf{Q}_2$  at the user and relay sides, a close observation of (4) shows that it is an instance of the standard DH AF system model described by (2), but with a different noise covariance given by

$$\begin{aligned} \boldsymbol{\Phi} &= \nu \delta_{t1}^2 \mathbf{H}_2 \mathbf{H}_1 \text{diag}(q_{11}, \dots, q_K) \mathbf{H}_1^H \mathbf{H}_2^H \\ &\quad + \mathbf{H}_2 \left( (\nu \delta_{r1}^2 \text{tr}(\mathbf{Q}_1) + \nu) \mathbf{I}_N + \nu \delta_{t2}^2 \text{diag}(q_{11}, \dots, q_M) \right) \mathbf{H}_2^H \\ &\quad + (\delta_{r2}^2 \text{tr}(\mathbf{Q}_2) + 1) \mathbf{I}_N. \end{aligned} \quad (14)$$

Taking into account for the optimality of the input signal  $\mathbf{x}_1$  since it is Gaussian distributed with the covariance matrix  $\mathbf{Q}_1 = \mu \mathbf{I}_K$ , the proof is concluded. ■

<sup>4</sup>The presence of impairments at the relay node signifies two different distortion noises  $\boldsymbol{\eta}_{r1}$  and  $\boldsymbol{\eta}_{r2}$ , where the latter one together with the distortion noise  $\boldsymbol{\eta}_{t2}$ , occurring at the BS, have been amplified during the second hop.

The above proposition (Proposition 1) allows us to investigate the impact of the additive transceiver impairments in DH AF systems for the cases of both finite and infinite system dimensions.

*Remark 1:* Interestingly,  $C_1$  represents the mutual information due to relaying and additive transceiver impairments, while the physical meaning of  $C_2$  describes the loss due to noise amplification.

*Remark 2:* Despite the resemblance of the ergodic capacity with transceiver impairments, given by (12), with the conventional ergodic capacity of a DH AF system with ideal hardware [26, Eq. 2], this paper shows the fundamental differences that arise because the noise covariance matrix now depends on the product of the channel matrices  $\mathbf{H}_1$  and  $\mathbf{H}_2$ , as shown by (14). As a result, it is non-trivial to provide the generalizations of the previous works on AF systems with ideal hardware to the case of transceiver impairments.

Subsequently, employing the property  $\det(\mathbf{I} + \mathbf{AB}) = \det(\mathbf{I} + \mathbf{BA})$ , the expressions for  $C_1$  and  $C_2$ , which denote the ergodic capacity per receive antenna with  $C_i = \frac{1}{N} C_i$  for  $i = 1, 2$ , can be alternatively written as

$$C_1 = \frac{1}{N} \mathbb{E} \left[ \ln \det \left( \mathbf{I}_M + f_3 \mathbf{H}_2^H \mathbf{H}_2 \left( \mathbf{I}_M + \tilde{f}_1 \mathbf{H}_1 \mathbf{H}_1^H \right) \right) \right] \quad (15)$$

$$C_2 = \frac{1}{N} \mathbb{E} \left[ \ln \det \left( \mathbf{I}_M + f_3 \mathbf{H}_2^H \mathbf{H}_2 \left( \mathbf{I}_M + \frac{f_2}{f_3} \mathbf{H}_1 \mathbf{H}_1^H \right) \right) \right]. \quad (16)$$

### III. ERGODIC CAPACITY ANALYSIS-FINITE NUMBER OF ANTENNAS

This section presents analytical results regarding the ergodic capacity of AF MIMO dual-hop systems under additive transceiver impairments. Well known results under the ideal assumption of perfect hardware, given in [26], are generalized by including the practical consideration of the imperfect transceiver hardware. It should be stressed that these results cannot be elicited from the prior works for several reasons such as that the noise covariance matrix depends on the product term  $\mathbf{H}_2 \mathbf{H}_1$ . Specifically, the following theorem is the key result of this section. We define  $p \triangleq \max(M, N)$ ,  $q \triangleq \min(M, N)$ ,  $s \triangleq \min(K, q)$ ,  $u = p - q - 1$ ,  $v = p + q - 1$ , and  $\tilde{q} = K + q$ , since these will be often used in our analysis.

#### A. Exact Expression for Ergodic Capacity

*Theorem 1:* The per receive antenna capacity of a DH AF system in the presence of i.i.d. Rayleigh fading channels with additive transceiver impairments in the case of a finite number of transmit users  $K$  as well as relay and BS antennas ( $M$  and  $N$ ) is given by

$$C = \frac{2K}{N} \sum_{l=1}^q \sum_{k=q-s+1}^q \sum_{i=0}^{q+K-l} \frac{\binom{\tilde{q}-l}{i} f_3^{\tilde{q}-l-i}}{\Gamma(K-q+k)} G_{l,k} \mathcal{I}_{i,k}, \quad (17)$$

where  $\mathcal{K}$  and  $G_{l,k}$  are defined in Lemma 1 (Appendix A) and

$$\begin{aligned} \mathcal{I}_{i,k} &= \int_0^\infty \ln \left( \frac{1+f_1\lambda}{1+f_2\lambda} \right) e^{-\lambda f_3} \lambda^{(2K+2k+u-i-2)/2} \\ &\quad \times K_{v-i} (2\sqrt{\lambda}) d\lambda, \end{aligned} \quad (18)$$

and  $\lambda$  denotes the unordered eigenvalue of  $\mathbf{Z} = \tilde{\mathbf{H}}_1 \mathbf{L} \tilde{\mathbf{H}}_1^H$ .

*Proof:* See Appendix B. ■

Interestingly, Theorem 1 extends the result in [26, Eq. 39] that did not consider any aggregate hardware impairments.

*Remark 3:* Given that in the second part, presenting the asymptotic behavior with respect to the number of antennas, we have derived the per-antenna capacity because our desire is to illustrate a consistency between the two regimes. As a result, by providing the per-antenna capacity we can validate the theoretical expressions corresponding to different numbers of antennas regimes. Actually, this is one of the contributions of our manuscript; the bridging between the two regimes and the depiction that the asymptotic results are tight even for the conventional number of antennas. It is worthwhile to mention that the per receive antenna capacity ( $1/N$ ) does not restrict us to evaluate the dependence on  $N$ .

#### B. Low SNR Regime

Despite the exact expression for the capacity of a DH AF channel with additive transceiver impairments, obtained by Theorem 1, its lack to reveal insightful conclusions by means of the dependencies with the various system parameters such as the number of BS and relay antennas as well as the inevitable hardware impairments leads to the need for investigation of the low power regime<sup>5</sup>. Thus, in the case of low SNR, we consider a meaningful scenario. Specifically, we let the user power tend to zero ( $\mu = 0$ ), while the relay transmit power is kept constant. Note that if we let the relay power tend to zero, no transmission is possible. For the sake of simplification of various expressions, we denote  $\tilde{\delta}_{t_1}^2 = \delta_{t_1}^2 + 1$ ,  $\tilde{\delta}_{t_2}^2 = \delta_{t_2}^2 + 1$ ,  $\tilde{\delta}_{r_2}^2 = \alpha \delta_{r_2}^2 + 1$ ,  $\tilde{\delta}_{tr_1}^2 = \delta_{tr_1}^2 + \delta_{t_1}^2 + 1$ , and  $\tilde{\delta}_{tr_1,\rho}^2 = \rho \tilde{\delta}_{tr_1}^2 + 1$ .

In the following, depending on the case and based on Jensen's inequality, we are able to change the order of expectation and the limit or derivative by applying the dominated convergence theorem [36], since the term inside the expectation is upper bounded by an integrable function.

It is known that the capacity in this region is well approximated as [37]

$$C \left( \frac{E_b}{N_0} \right) \approx S_0 \ln \left( \frac{\frac{E_b}{N_0}}{\frac{E_b}{N_{0\min}}} \right), \quad (19)$$

where the two key element parameters  $\frac{E_b}{N_{0\min}}$  and  $S_0$  represent the minimum transmit energy per information bit and the wideband slope, respectively. In particular, we can express them in terms of the first and second derivatives of  $C(\rho)$  as

$$\frac{E_b}{N_{0\min}} = \lim_{\rho \rightarrow 0} \frac{\rho}{C(\rho)} = \frac{1}{\dot{C}(0)}, \quad (20)$$

$$S_0 = - \frac{2 \left[ \dot{C}(0) \right]^2}{\ddot{C}(0)} \ln 2. \quad (21)$$

*Theorem 2:* In the low-SNR regime, the minimum transmit energy per information bit,  $\frac{E_b}{N_{0\min}}$ , and the wideband slope  $S_0$ , of a DH AF channel in the presence of i.i.d. Rayleigh fading channels subject to additive transceiver impairments, are

<sup>5</sup>The high SNR case is not included in this paper due to space limitations.

given by (22) and (23), where  $\mathbb{E}[\lambda] \Big|_{\rho=0}$  and  $(\mathbb{E}[\lambda])' \Big|_{\rho=0}$  are given in Appendix C with  $\lambda$  being the unordered eigenvalue of  $\mathbf{Z} = \tilde{\mathbf{H}}_1 \mathbf{L} \tilde{\mathbf{H}}_1^H$ .

*Proof:* See Appendix C.  $\blacksquare$

### C. Tight Lower and Upper Bounds of the Ergodic Capacity

Having in mind that the ergodic capacity, obtained in (17), can be calculated only numerically, in this section, we provide upper and lower tight bounds of the ergodic capacity in tractable closed forms that can describe the easier behavior of C. Obviously, their importance is indisputable because they shed light on interesting properties regarding the impact of residual impairments on the ergodic capacity.

*Theorem 3:* The ergodic capacity of AF MIMO dual-hop systems with i.i.d. Rayleigh fading channels under additive transceiver impairments can be upper and lower bounded by

$$C_U = \tilde{C}_{U,1} - \tilde{C}_{U,2} \quad \text{and} \quad C_L = \tilde{C}_{L,1} - \tilde{C}_{L,2}, \quad (24)$$

where  $\tilde{C}_{U,i}$ ,  $\tilde{C}_{L,i}$  for  $i = 1, 2$  are given by (49), (51).

*Proof:* See Appendix D.  $\blacksquare$

## IV. ASYMPTOTIC PERFORMANCE ANALYSIS

Since the cost-efficiency of the massive MIMO technology depends on the application of inexpensive hardware and such inexpensive hardware components will make the deleterious effect of the residual impairments more pronounced, it is of pivotal importance to study the ergodic capacity in the large system regime, i.e., users, relays, and the BS equipped with a large number of antennas. Hence, this section presents the main results regarding the system performance in the large-antenna regime. Moreover, we account also for the scenario where the number of users increases infinitely. However, note that both the system power  $\rho$  and the total gain of the relay  $\alpha$  are kept finite<sup>6</sup>.

### A. Main Results

Given that our interest is focused on channel matrices with dimensions tending to infinity, we employ tools from the large RMT. Among the advantages of the ensuing analysis, we mention the achievement of deterministic results that make Monte Carlo simulations unnecessary. Moreover, the asymptotic analysis can be quite accurate even for realistic system dimensions, while its convergence is rather fast as the channel matrices grow larger. Under ideal hardware, the ergodic capacity was obtained in [39], however, the deduction to the case with RF impairments is not trivial, as stated in Section-III. Thus, after defining  $\beta \triangleq \frac{K}{M}$  and  $\gamma \triangleq \frac{N}{M}$ , the channel capacity of the system under study is given by the following theorem.

<sup>6</sup>These power constraints justify the power normalizations during the description of the system model, in order to keep the system power and the total gain of the relay finite, while the dimensions grow infinite. Especially, this is requisite because the capacity would grow to infinity if the system power was infinite. Furthermore, it should be noted that this is a constraint which is applied to the per-user power, but it can be straightforwardly expressed as a normalization on the system power. Finally, it should be noted that this is a well-accepted model already employed in a plethora of published papers such as [26], [27], [38].

*Theorem 4:* The capacity of a DH AF MIMO system in the presence of i.i.d. Rayleigh fading channels with additive transceiver impairments, when the numbers of transmit users  $K$  as well as relay and BS antennas ( $M$  and  $N$ ) tend to infinity with a given ratio, is given by

$$C \rightarrow \frac{1}{\gamma} \int_0^\infty \ln \left( 1 + \tilde{f}_3 x \right) \left( f_{\mathbf{K}_{f_1}/M}^\infty(x) - f_{\mathbf{K}_{f_2}/M}^\infty(x) \right) dx, \quad (25)$$

where  $\tilde{f}_3 = \frac{\alpha(1+\delta_{r_1}^2\rho+\delta_{r_2}^2\delta_{tr_1}^2)\rho}{\delta_{r_2}^2(1+\delta_{tr_1}^2)\rho}$ ,  $\mathbf{K}_{f_1} = \mathbf{H}_2^H \mathbf{H}_2 (\mathbf{I}_M + f_1 \times \mathbf{H}_1 \mathbf{H}_1^H)$  and  $\mathbf{K}_{f_2} = \frac{\mathbf{H}_2^H \mathbf{H}_2 (\mathbf{I}_M + f_2/f_3 \mathbf{H}_1 \mathbf{H}_1^H)}{f_3}$ , while the asymptotic eigenvalue probability density functions (a.e.p.d.f.) of  $\mathbf{K}_{f_1}/M$  and  $\mathbf{K}_{f_2}/f_3/M$ ,  $f_{\mathbf{K}_{f_1}/M}^\infty$  and  $f_{\mathbf{K}_{f_2}/M}^\infty$ , respectively, are obtained by the imaginary part of their corresponding Stieltjes transforms  $\mathcal{S}$  for real arguments.

*Proof:* See Appendix E.  $\blacksquare$

### B. Special Cases

Herein, we investigate the ergodic capacity of the DH AF system with additive impairments, when its dimensions grow in turn larger without a bound.

*Proposition 2:* The ergodic capacity of the DH AF system with additive impairments, when the number of users  $K$  tends to infinity, reduces to

$$\lim_{K \rightarrow \infty} C = \mathbb{E} \left[ \ln \det \left( \frac{\mathbf{I}_q + \frac{\alpha \delta_{r_2}^2}{M \delta_{r_2}^2} \mathbf{H}_2 \mathbf{H}_2^H}{\mathbf{I}_q + \frac{\alpha(\delta_{r_2}^2 \delta_{tr_1,1}^2 + \delta_{r_1}^2 \rho + \delta_{tr_1}^2 \rho + 1)}{M \delta_{r_2}^2 \delta_{tr_1,1}^2 \rho} \mathbf{H}_2 \mathbf{H}_2^H} \right) \right]. \quad (26)$$

*Proof:* See Appendix F-A.  $\blacksquare$

*Proposition 3:* The ergodic capacity of the DH AF system subject to additive impairments, when the number of relay antennas  $M$  tends to infinity, reduces to (27), where  $\tilde{\mathbf{H}}_1 \sim \mathcal{CN}(\mathbf{0}, \mathbf{I}_K \otimes \mathbf{I}_q)$ .

*Proof:* See Appendix F-B.  $\blacksquare$

*Proposition 4:* The ergodic capacity of the DH AF system subject to additive impairments, when the number of BS antennas  $N$  tends to infinity, is given by

$$\lim_{N \rightarrow \infty} C = \mathbb{E} \left[ \ln \det \left( \frac{\mathbf{I}_K + \frac{\tilde{\delta}_{tr_1}^2 \rho}{K(\delta_{r_2}^2 \tilde{\delta}_{tr_1,1}^2 + \delta_{r_1}^2 \rho + 1)} \tilde{\mathbf{H}}_1 \tilde{\mathbf{H}}_1^H}{\mathbf{I}_K + \frac{\tilde{\delta}_{tr_1}^2 \rho}{K(\delta_{r_2}^2 \tilde{\delta}_{tr_1,1}^2 + \delta_{r_1}^2 \rho + 1)} \tilde{\mathbf{H}}_1 \tilde{\mathbf{H}}_1^H} \right) \right], \quad (28)$$

where  $\tilde{\mathbf{H}}_1 \sim \mathcal{CN}(\mathbf{0}, \mathbf{I}_K \otimes \mathbf{I}_q)$ .

*Proof:* See Appendix F-C.  $\blacksquare$

These propositions generalize the results presented in [26, Eqs. 42–44] for arbitrary  $K$ ,  $M$ , and  $N$  configurations under the unavoidable presence of additive transceiver impairments. Notably, these impairments affect the asymptotic limits, while our proposed expressions reduced to (42) – (44) in [26] for the ideal case where perfect transceiver hardware is assumed. Especially, in the high-SNR regime, we witness a hardening effect due to the various imperfections affecting differently the ergodic capacity. For example, when  $K \rightarrow \infty$ , and the second hop impairments are negligible, i.e.,  $(\delta_{r_2}^2 = \delta_{r_1}^2 = 0)$ , the nominator of (26) does not depend on any impairments, and

$$\frac{E_b}{N_{0\min}} = \frac{KM\tilde{\delta}_{r_2}^2}{\alpha s\mathbb{E}[\lambda] \Big|_{\rho=0}} \ln 2 \quad (22)$$

$$S_0 = \frac{2K^4 M^4 \tilde{\delta}_{r_2}^4}{\alpha^3 s^3 \mathbb{E}^2[\lambda] \Big|_{\rho=0} (2KM\tilde{\delta}_{r_2}^2 \left( \mathbb{E}[\lambda] \Big|_{\rho=0} \tilde{\delta}_{tr_1}^2 - (\mathbb{E}[\lambda])' \Big|_{\rho=0} \right) - \alpha(2\delta_{t_1}^2 + 1)\mathbb{E}[\lambda^2] \Big|_{\rho=0})} \quad (23)$$

$$\lim_{M \rightarrow \infty} C = \mathbb{E} \left[ \ln \det \left( \frac{\mathbf{I}_K + \frac{\alpha \tilde{\delta}_{t_1}^2 \rho}{K(\tilde{\delta}_{r_2}^2 \tilde{\delta}_{tr_1, \rho}^2 + \alpha(\tilde{\delta}_{t_2}^2 \tilde{\delta}_{tr_1, \rho}^2 + \delta_{r_1}^2 \rho + 1))} \tilde{\mathbf{H}}_1 \tilde{\mathbf{H}}_1^H}{\mathbf{I}_K + \frac{\alpha \tilde{\delta}_{t_1}^2 \rho}{K(\tilde{\delta}_{r_2}^2 \tilde{\delta}_{tr_1, \rho}^2 + \alpha(\tilde{\delta}_{t_2}^2 \tilde{\delta}_{tr_1, \rho}^2 + \delta_{r_1}^2 \rho + 1))} \tilde{\mathbf{H}}_1 \tilde{\mathbf{H}}_1^H} \right) \right]. \quad (27)$$

it reduces to the ergodic capacity of a conventional single-hop i.i.d. Rayleigh fading MIMO channel with the transmit power  $\alpha$ , and  $M$  transmit antennas. Another interesting intuitive outcome comes from Proposition 3, when the relay transmit power  $\alpha$  diminishes to zero and the user transmit power  $\rho$  is fixed or vice-versa. Specifically, the ergodic capacity reduces to zero, which means no communication between the users and the BS can occur. Nevertheless, Proposition 4 reveals that the ergodic capacity of this DH AF system with transceiver imperfections does not depend on the relay power  $\alpha$ , when the number of BS antennas  $N$  grows larger. It is also worthwhile to mention that the ergodic capacity is characterized by the fading of the channel of the second hop when the number of users grows large, while this disappears when  $M$  or  $N$  go to infinity. In such a case,  $C$  depends only on the channel of the first hop.


## V. NUMERICAL RESULTS

In this section, we verify the theoretical analysis carried out in previous sections, and subsequently illustrate the impact of impairments on the ergodic capacity of dual-hop AF MIMO relay systems. Obviously, a saturation of the ergodic capacity appears at high SNR, which agrees with similar results in the literature [11], [18], [22]. The reason behind the saturation can be easily extracted by a close observation of the system model. In other words, there is a term in the denominator of the SNR due to hardware impairments that scales with the power.

### A. Finite Results

Figure 2(a) provides the comparison of per-antenna ergodic capacity versus  $\rho$  with and without imperfections considering  $K = 2$ ,  $M = 4$ ,  $N = 3$ . The theoretical curve for the case without impairments was obtained by evaluating (39) from [26], while for the case with impairments, it was obtained by evaluating (17). Further, the simulated curves were obtained by averaging the corresponding capacities over  $10^3$  random instances of  $\mathbf{H}_1$  and  $\mathbf{H}_2$ . From the figure, it can be shown that the exact finite analysis matches well with the Monte Carlo (MC) simulation for the arbitrary values of  $K$ ,  $M$  and  $N$ . The per-antenna ergodic capacity monotonically increases with the increase in the value of  $\rho$  in the absence of hardware impairments, but in the presence of impairments, the ergodic

capacity first increases with  $\rho$  and then gets saturated after a certain value of SNR. Also, the per-antenna ergodic capacity in the presence of impairments is almost the same as the capacity in the absence of impairments at the lower values of  $\rho$ , i.e.,  $\rho < 5$  dB, but the gap between these two capacities increases with the value of  $\rho$ .

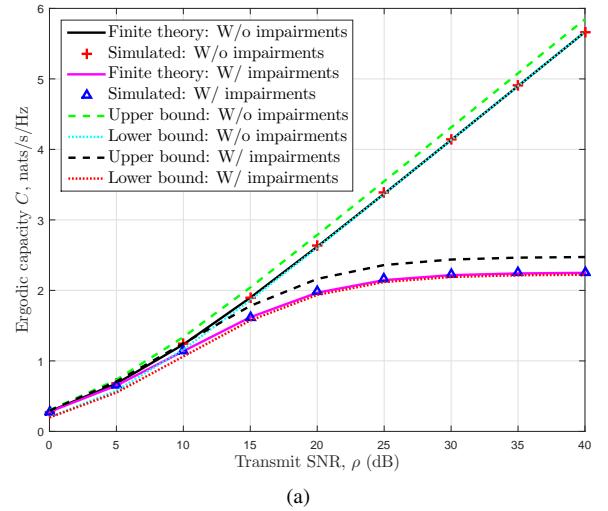

(a)

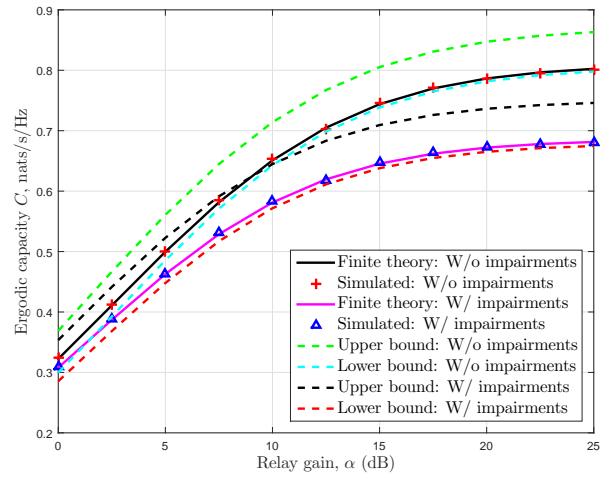


Fig. 2. Per-antenna ergodic capacity versus (a)  $\rho$  with and without imperfections ( $\delta_{t_1} = \delta_{t_2} = \delta_{r_1} = \delta_{r_2} = 0.08$ ,  $K = 2$ ,  $M = 4$ ,  $N = 3$ ,  $\alpha = 2\rho$ ), (b)  $\alpha$  with and without imperfections ( $\mu = 15$  dB,  $\delta_{t_1} = \delta_{t_2} = \delta_{r_1} = \delta_{r_2} = 0.08$ ,  $K = 2$ ,  $M = 1$ ,  $N = 4$ ,  $\alpha = 2\rho$ )

Besides, Fig. 2(a) also depicts the theoretical upper and lower bounds of the per-antenna ergodic capacity. The presented theoretical bounds for the case without impairments were obtained by using (67) and (75) from [26]. Similarly, the bounds for the case with impairments were obtained by evaluating (24) using the involved equations. The capacity results as well as the bounds in the absence of impairments are in close agreement with the results presented in Fig. 6 of [26]. It can be observed that both bounds are tight over the considered range of SNR values. Moreover, the closed-form upper bound coincides with the exact capacity curve at the lower SNR regime ( $\rho < 5$  dB in Fig. 2(a)), and the lower bound coincides with the exact capacity curve at the higher SNR regime. Clearly, similar observations can be noticed for the case with impairments.

Figure 2(b) presents the comparison of the per-antenna capacity versus the relay gain  $\alpha$  in the presence and the absence of impairments. It can be observed that the per-antenna ergodic capacity first increases with the increase in the value of  $\alpha$  and saturates after a certain value of  $\alpha$ . Also, it can be noted that the upper and lower bounds are tight over the considered range of  $\alpha$  for both cases. Another important observation is that the capacity loss due to the presence of impairments is quite small at the lower values of  $\alpha$  and increases with the increase in the value of  $\alpha$  until both capacity curves reach the saturation.

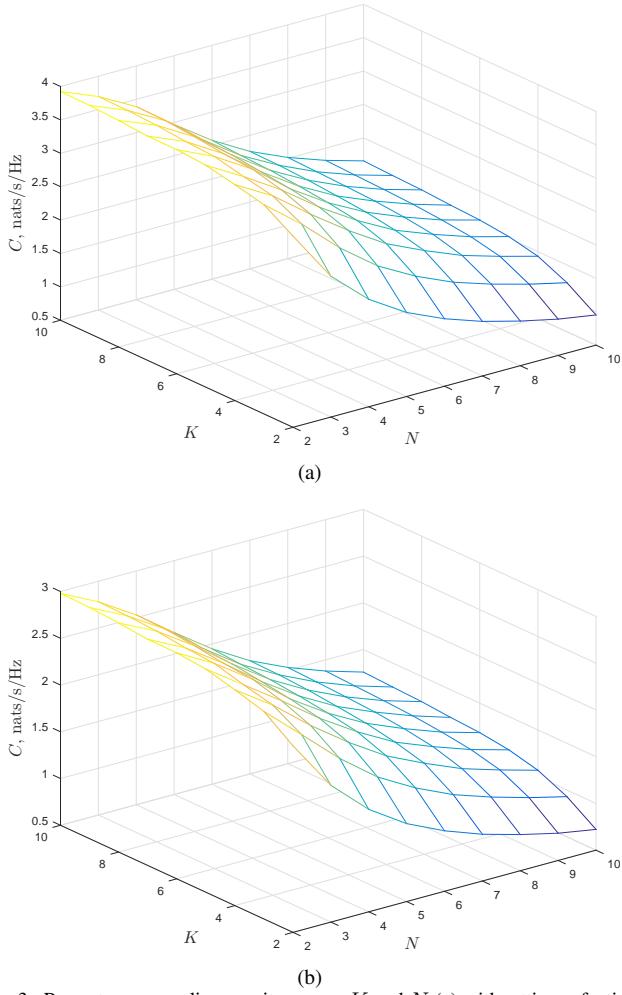


Fig. 3. Per-antenna ergodic capacity versus  $K$  and  $N$  (a) without imperfections, (b) with imperfections ( $\mu = 20$  dB,  $\delta_{t1} = \delta_{t2} = \delta_{r1} = \delta_{r2} = 0.08$ ,  $M = 4$ ,  $\alpha = 2\rho$ )

Figures 3(a) and 3(b) illustrate the per-antenna ergodic capacity versus  $K$  and  $N$  in the absence and the presence of transceiver imperfections, respectively. From the figure, it can be noted that the per-antenna ergodic capacity monotonically increases with  $K$ , whereas it monotonically decreases with the increase in the value of  $N$ . It should be noted that the decreasing trend of the capacity with respect to  $N$  in Fig. 3(a) and Fig. 3(b) is due to the fact we plot the per-antenna capacity (normalized with respect to  $N$ ) instead of the capacity itself. However, the total ergodic capacity monotonically increases with  $N$  and the rate of this increase is observed to be significantly higher than the rate of increase with respect to  $K$ .

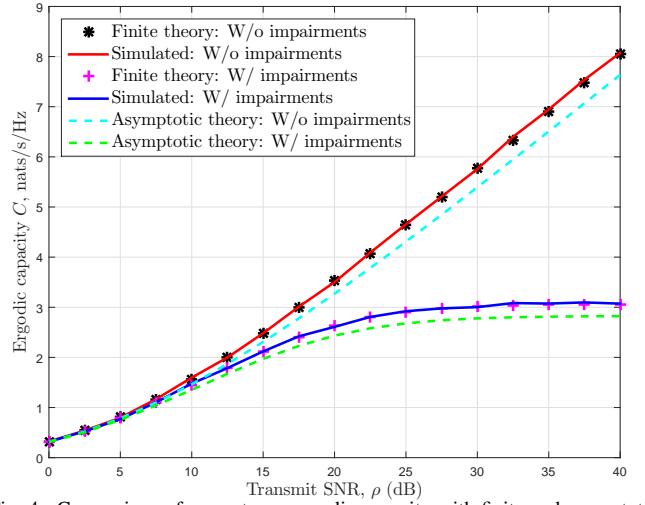


Fig. 4. Comparison of per-antenna ergodic capacity with finite and asymptotic analyses ( $\delta_{t1} = \delta_{t2} = \delta_{r1} = \delta_{r2} = 0.08$ ,  $K = 1$ ,  $M = 2$ ,  $N = 1$ ,  $\alpha = 2\rho$ )

Figure 4 presents the comparison of the per-antenna ergodic capacity versus  $\rho$  for finite and asymptotic cases by considering the cases of the presence and the absence of impairments (with parameters  $\delta_{t1} = \delta_{t2} = \delta_{r1} = \delta_{r2} = 0.08$ ,  $K = 1$ ,  $M = 2$ ,  $N = 1$ ,  $\alpha = 2\rho$ ). From the figure, it can be observed that finite results exactly match with that of the simulated capacity results but the asymptotic results show a slight deviation with respect to the simulated results. However, as noted in the next subsection, the asymptotic results match quite well with the simulated ones even for the moderate values of  $M$ ,  $N$ , and  $K$ .

Figure 5 presents the per-antenna ergodic capacity with low SNR approximation in the presence and the absence of impairments. In the presented results,  $\frac{E_b}{N_{0\min}}$  depicts the intersection of the capacity curves with the horizontal axis. From Fig. 5, it can be shown that not only the slope of the ergodic capacity curve decreases when impairments are considered, but also the minimum transmit energy per information bit is affected. In other words, the transceiver impairments generally have not only a second-order impact on the capacity in the low-SNR regime as in [11], but in the case of the relay channel, there is also a first-order effect. Further, another important observation is that the value of  $\frac{E_b}{N_{0\min}}$  increases with the increase in the value of impairments. This is due to the dependence of  $\frac{E_b}{N_{0\min}}$  on the values of  $\delta_{t2}$  and  $\delta_{r2}$ .

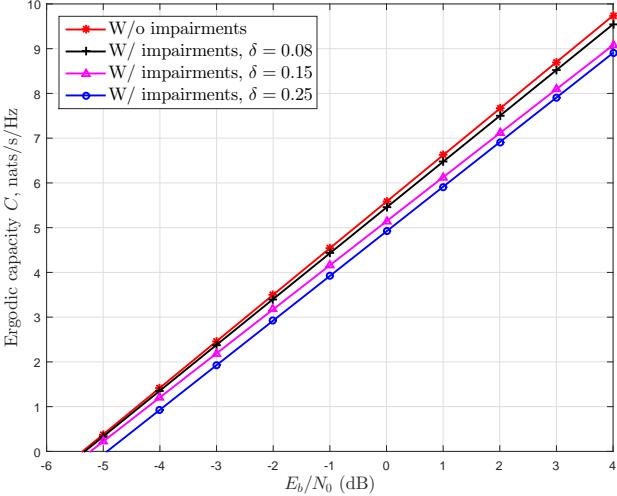


Fig. 5. Per-antenna ergodic capacity with low SNR approximation ( $\delta_{t_1} = \delta_{t_2} = \delta_{r_1} = \delta_{r_2} = \delta$ ,  $K = 2$ ,  $M = 3$ ,  $N = 2$ ,  $\alpha = 2$  dB)

### B. Asymptotic Results

In Fig. 6, we illustrate the theoretical and simulated per-antenna ergodic capacities versus  $\rho$  for the following two cases: (i) without impairments, and (ii) with impairments on transmitter and receiver of both links. From the figure, it can be noted that the theoretical and the simulated capacity curves for both the considered cases match perfectly. Furthermore, the per-antenna capacity increases with  $\rho$  in the absence of impairments, i.e.,  $\delta_{t_1} = \delta_{t_2} = \delta_{r_1} = \delta_{r_2} = 0$  as expected. Moreover, another important observation is that the per-antenna capacity saturates after a certain value of  $\rho$  in the presence of impairments. The trend of the per-antenna capacity saturation with respect to  $\rho$  in Fig. 6 is well aligned with the result obtained in [11] for the case of MIMO systems. However, for the considered scenario in this paper, an early saturation of the capacity in the presence of impairments is noted due to the introduction of the relay node impairments. Nevertheless, in Fig. 6, we also illustrate the effect of different values of impairments on the capacity considering the values of  $\delta_{t_1} = \delta_{t_2} = \delta_{r_1} = \delta_{r_2} = \delta$  as 0.05, 0.08 and 0.15. Specifically, it can be observed that with the increase in the value of impairments, the saturation point appears earlier, i.e., at the lower values of  $\rho$ .

Figures 7(a) and Figure 7(b) present the per-antenna capacity versus  $\rho$  and  $\alpha$  in the presence and the absence of impairments, respectively. It can be observed that in the absence of impairments, the capacity increases monotonically with the increase of both  $\rho$  and  $\alpha$  with the slope being more steeper for the case of  $\rho$ . In addition, the slope for both capacity curves decreases at their higher values. Notably, in the presence of impairments, a clear saturation can be observed with the increase of  $\rho$  and  $\alpha$  after their certain values. Moreover, in Figs. 8(a) and 8(b), we plot the per-antenna capacity versus the channel dimensions  $\gamma$  and  $\beta$  in the absence and the presence of channel impairments, respectively. In both cases, the capacity increases monotonically with both  $\beta$  and  $\frac{1}{\gamma}$ , however, the slope with respect to  $\frac{1}{\gamma}$  is steeper as compared to the slope with  $\beta$ . This trend remains almost the same in the presence of impairments, but the slope of the capacity curve with respect to  $\frac{1}{\gamma}$  in Fig. 8(b) is observed to be less steeper than in Fig. 8(a) at the higher values of  $\frac{1}{\gamma}$ .

Figure 9(a) depicts the per-antenna ergodic capacity versus

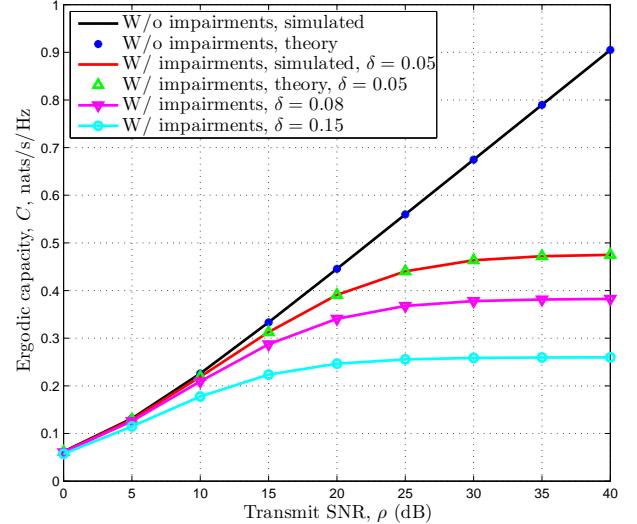



Fig. 6. Per-antenna capacity versus  $\rho$  ( $\delta_{t_1} = \delta_{t_2} = \delta_{r_1} = \delta_{r_2} = \delta$ ,  $K = 50$ ,  $M = 10$ ,  $N = 100$ ,  $\beta = 5$ ,  $\gamma = 10$ ,  $\alpha = 2\rho$ )

the number of source antennas, i.e.,  $K$  by considering the cases with and without impairments. From the figure, it can be noted that the per-antenna ergodic capacity initially increases with the increase in the value of  $K$ , and it saturates at the higher values of  $K$  for both cases. In addition, in Fig. 9(a), we plot the capacity results from the infinite  $K$  bound for both cases. For the case without impairments, the infinite  $K$  bound capacity curve is obtained by using (43) from [26], while for the case with impairments, it is obtained by evaluating (26). Clearly, it is noted that the infinite  $K$  bound approximates the exact result in the infinite  $K$  regime for both cases.


Figure 9(b) presents the variation of the per-antenna ergodic capacity with the number of antennas at the relay, i.e.,  $M$ , by considering parameters ( $\rho = 20$  dB,  $\delta_{t_1} = \delta_{t_2} = \delta_{r_1} = \delta_{r_2} = 0.08$ ,  $K = 20$ ,  $N = 20$ ). From the figure, it can be deduced that the capacity initially increases with the value of  $M$  and gets almost saturated at the higher values of  $M$  for both cases. In Fig. 9(b), we also plot the per-antenna ergodic capacity obtained from the infinite  $M$  bound for the case without impairments using (42) from [26]. It can be noted that the capacity results considering the infinite  $M$  bound almost approximate the exact results in the infinite  $M$  regime. Moreover, in Fig. 9(c), we plot the per-antenna capacity with the value of  $N$  for the cases with impairments and without impairments. Further, we also plot the per-antenna ergodic capacity obtained from the infinite  $N$  bound for the case without impairments using (44) from [26]. It can be noted that the capacity results considering the infinite  $N$  bound almost approximate the exact result in the infinite  $N$  regime.

Till now, we have considered that the node components have the same quality, i.e., they present the same distortion<sup>7</sup>. In order to illustrate the effect of different impairments on the per-antenna ergodic capacity, we plot the capacity versus  $\delta$  in

<sup>7</sup>Note that under this system model, in a practical large MIMO scenario, both the relay and the BS are going to have larger number of antennas than the source. Hence, they will be more prone (larger distortions) to hardware impairments. The reason is that large MIMO are attractive, when the cost of the antennas is low, which results to lower quality elements with more induced hardware impairments.

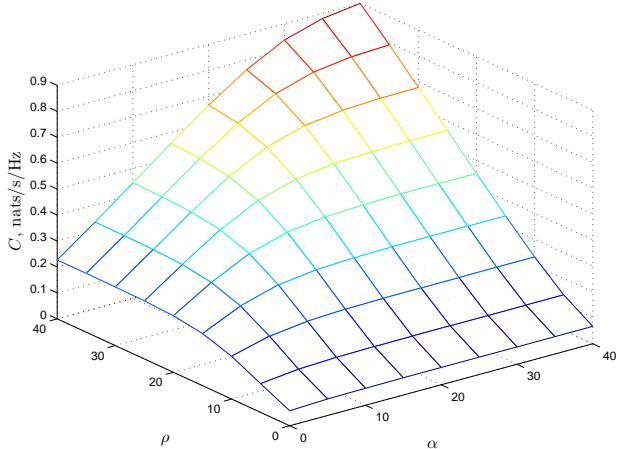


(a)

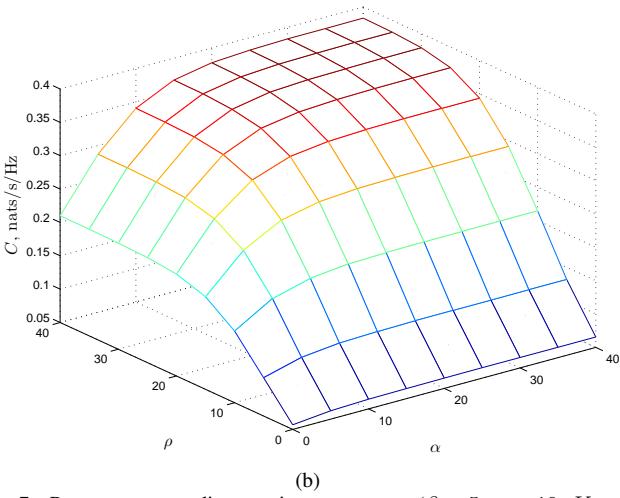


(b)

Fig. 7. Per-antenna ergodic capacity versus  $\rho$ ,  $\alpha$  ( $\beta = 5$ ,  $\gamma = 10$ ,  $K = 50$ ,  $M = 10$ ,  $N = 100$ ), (a)  $\delta_{t1} = \delta_{t2} = \delta_{r1} = \delta_{r2} = 0$ , (b)  $\delta_{t1} = \delta_{t2} = \delta_{r1} = \delta_{r2} = 0.08$

Fig. 10, by considering parameters ( $\rho = 5$  dB,  $\beta = 5$ ,  $\gamma = 10$ ,  $N = 100$ ,  $M = 10$ ,  $K = 50$ ,  $\alpha = 2\rho$ ). For this evaluation, all other impairments values are considered to be zero while analyzing the effect of a particular impairment. From the figure, it can be noted that the per-antenna ergodic capacity decreases with the increase in the value of impairment for all cases. Further, the effect of  $\delta_{t2}$  on the per-antenna ergodic capacity is found to be the most severe as compared to the effects of other impairments. Other observations from Fig. 10 are that the effects of  $\delta_{t1}$  and  $\delta_{r1}$  on the per-antenna ergodic capacity are almost the same, and the impairment  $\delta_{r2}$  has significantly less effect than the rest of impairments. However, note that the ordering of the capacity curves with respect to the variations in the considered impairments depends on the value of the parameters  $\rho$ ,  $\alpha$ ,  $M$ ,  $N$ , and  $K$ . In our results, the trend of the capacity curves with respect to different impairments was found to be quite stable for large values of  $M$ ,  $N$ , and  $K$  i.e.,  $N = 100$ ,  $M = 10$ , and  $K = 50$  and lower values of  $\rho$ . This can be observed by (4), the definition  $\nu = \frac{\alpha}{KM\bar{\mu}}$ , and the considered set of parameters. However, for small values of  $M$ ,  $N$ , and  $K$ , the ordering of the performance curves was found to vary significantly even with a small variation in the values of  $\rho$  and  $\alpha$ .

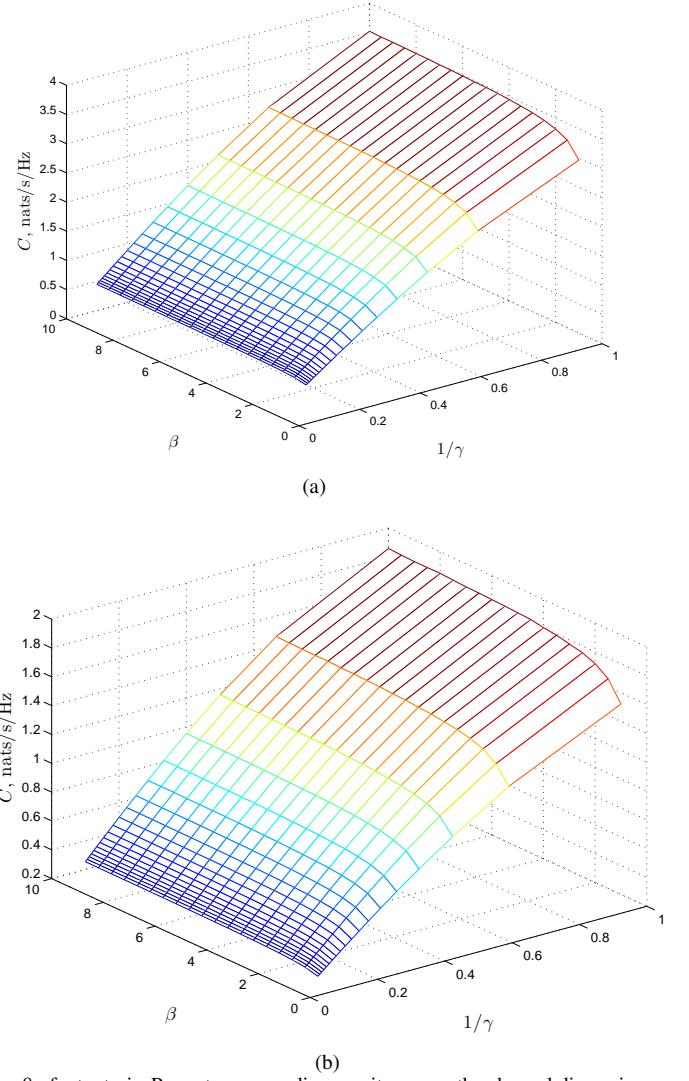

(a)

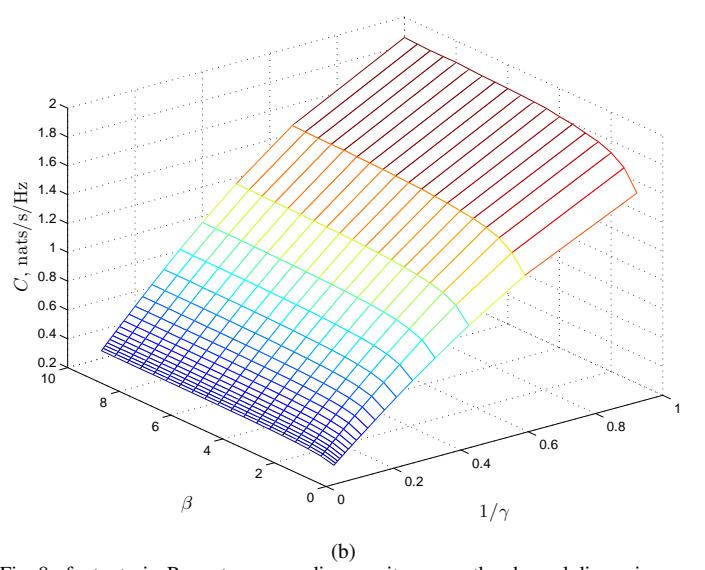


(b)


Fig. 8. footnotesizePer-antenna ergodic capacity versus the channel dimensions  $\beta$ ,  $\gamma$  ( $\rho = 20$  dB,  $\alpha = 2\rho$ ) (a)  $\delta_{t1} = \delta_{t2} = \delta_{r1} = \delta_{r2} = 0$ , (b)  $\delta_{t1} = \delta_{t2} = \delta_{r1} = \delta_{r2} = 0.15$

## VI. CONCLUSIONS


While the transceiver hardware impairments are inherent in any communication system, their impact on DH AF relay systems with multiple antennas was not taken into consideration, since prior work assumed the idealistic scenario of perfect hardware or single-antenna nodes. Hence, we introduced the aggregate hardware impairments on a DH AF relay system, and investigated their impact for the case of the system nodes having multiple number of antennas. In particular, initially, we elaborated on the MIMO ergodic capacity, when the number of antennas is finite as in contemporary (conventional) systems. Specifically, building on some existing results, we derived an exact expression for the ergodic capacity, simplified tight lower and upper bounds, and interestingly, low-SNR approximations. The need to provide a complete study concerning the next generation systems (massive MIMO) led us to derive the ergodic capacity in the setups with a very large number of antennas by pursuing a free probability analysis. Furthermore, the validation of the analytical results was shown by reducing to special cases and by means of simulations. In particular, simulations depicted that the asymptotic results can be applicable even for

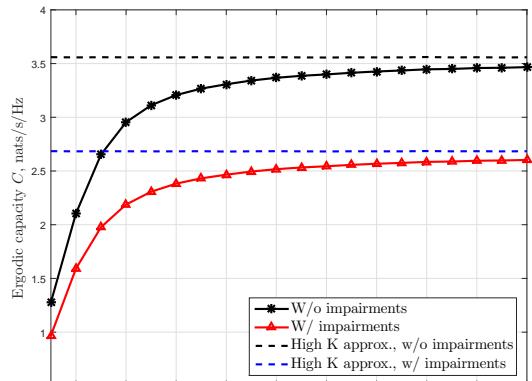

(a)

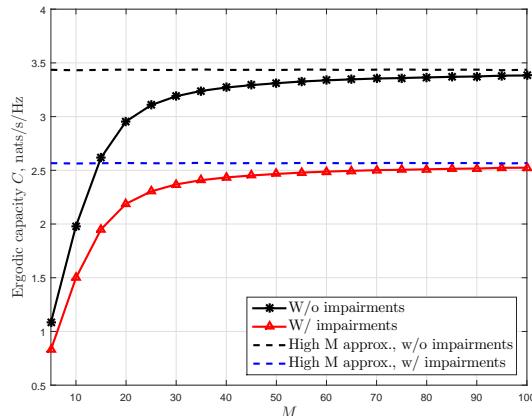

(b)

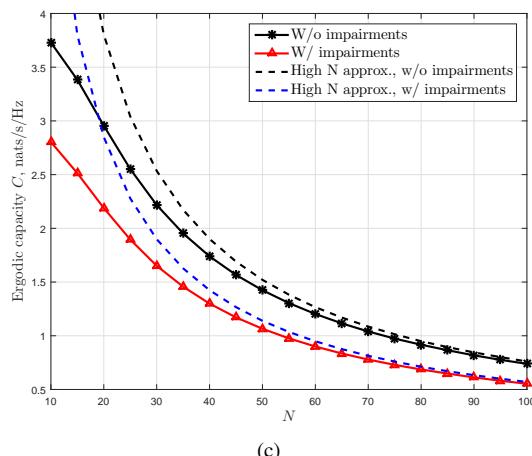

(c)

Fig. 9. Per-antenna ergodic capacity versus (a)  $K$  ( $\rho = 20$  dB,  $\delta_{t_1} = \delta_{t_2} = \delta_{r_1} = \delta_{r_2} = 0.08$ ,  $M = 20$ ,  $N = 20$ ,  $\alpha = 2\rho$ ), (b)  $M$  ( $\rho = 20$  dB,  $\delta_{t_1} = \delta_{t_2} = \delta_{r_1} = \delta_{r_2} = 0.08$ ,  $K = 20$ ,  $N = 20$ ,  $\alpha = 2\rho$ ), (c)  $N$  ( $\rho = 20$  dB,  $\delta_{t_1} = \delta_{t_2} = \delta_{r_1} = \delta_{r_2} = 0.08$ ,  $K = 20$ ,  $M = 20$ ,  $\alpha = 2\rho$ )

contemporary system dimensions. Moreover, it has been shown that the ergodic capacity with transceiver impairments saturates after a certain SNR and a large number of antennas. Notably, while the transceiver impairments have only a second-order impact on the capacity in the low-SNR regime of point-to-point MIMO systems, there also exists a first-order effect for the case of the relay channel. Among the future research targets, the inclusion of channel correlation, training, and more realistic hardware impairments model will be considered.

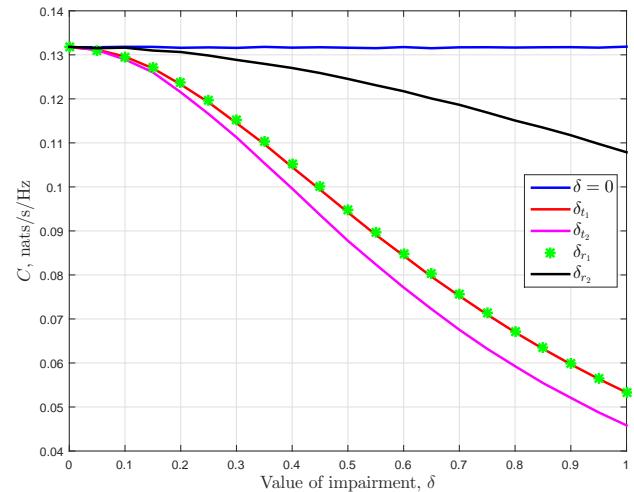


Fig. 10. Per-antenna ergodic capacity versus  $\delta$  ( $\rho = 5$  dB,  $\beta = 5$ ,  $\gamma = 10$ ,  $N = 100$ ,  $M = 10$ ,  $K = 50$ ,  $\alpha = 2\rho$ )

## APPENDIX A USEFUL LEMMAS

Herein, given the eigenvalue probability distribution function  $f_{\mathbf{X}}(x)$  of a matrix  $\mathbf{X}$ , we provide useful definitions and lemmas that are considered during our analysis.

**Lemma 1 (The pdf of the unordered eigenvalue of  $\mathbf{HLH}^H$  [26, Theorem 1]):** The marginal pdf  $p_{\lambda}(\lambda)$  of the unordered eigenvalue  $\lambda$  of  $\mathbf{HLH}^H$ , where  $\mathbf{L} = \text{diag}\{\frac{\lambda_i^2}{1+a\lambda_i^2}\}_{i=1}^q$  and  $\mathbf{H} \sim \mathcal{CN}(\mathbf{0}, \mathbf{I}_K \otimes \mathbf{I}_q)$  with  $p = \max(M, N)$ ,  $q = \min(M, N)$ , and  $s = \min(K, q)$ , is given by

$$p_{\lambda}(\lambda) = \mathcal{A} e^{-\lambda a} \lambda^{(2K+2k+u-i-2)/2} K_{v-i} \left(2\sqrt{\lambda}\right) G_{l,k}, \quad (29)$$

where  $\mathcal{A} = \frac{2\mathcal{K}}{s} \sum_{l=1}^q \sum_{k=q-s+1}^q \sum_{i=0}^{\bar{q}-l} \frac{\bar{q}-l}{\Gamma(K-q+k)} \frac{(\bar{q}-l) a^{\bar{q}-l-i}}{\Gamma(K-q+k)} G_{l,k}$  with

$$\mathcal{K} = \left( \prod_{i=1}^q \Gamma(q-i+1) \Gamma(p-i+1) \right)^{-1}, \quad (30)$$

and  $G_{l,k}$  is the  $(l, k)$ th cofactor of a  $q \times q$  matrix  $\mathbf{G}$  whose  $(m, n)$ th entry is

$$[G]_{m,n} = a^{-u-m-n} \Gamma(u+m+n) U\left(u+m+n, v+1, \frac{1}{a}\right). \quad (31)$$

## APPENDIX B PROOF OF THEOREM 1

**Proof:** Given a conventional system with finite dimensions, i.e., finite number of users and antennas, we start from (13), and we consider each term separately. Thus, for  $C_1$ , we have

$$\begin{aligned} C_1 &= \mathbb{E}[\log_2 \det(\Phi + \mathbf{H}_2 \mathbf{H}_1 \mathbf{H}_1^H \mathbf{H}_2^H)] \\ &= \mathbb{E}[\log_2 \det(\mathbf{I}_N + f_1 \mathbf{H}_2 \mathbf{H}_1 \mathbf{H}_1^H \mathbf{H}_2^H (\mathbf{I}_N + f_3 \mathbf{H}_2 \mathbf{H}_2^H)^{-1})] \\ &\quad + \mathbb{E}[\log_2 \det(\mathbf{I}_N + f_3 \mathbf{H}_2 \mathbf{H}_2^H)], \end{aligned} \quad (32)$$

while the other term of (13) can be written as

$$\begin{aligned} C_2 &= \mathbb{E}[\log_2 \det(\Phi)] \\ &= \mathbb{E}[\log_2 \det(\mathbf{I}_N + f_2 \mathbf{H}_2 \mathbf{H}_1 \mathbf{H}_1^H \mathbf{H}_2^H (\mathbf{I}_N + f_3 \mathbf{H}_2 \mathbf{H}_2^H)^{-1})] \\ &\quad + \mathbb{E}[\log_2 \det(\mathbf{I}_N + B \mathbf{H}_2 \mathbf{H}_2^H)]. \end{aligned} \quad (33)$$

Subtraction of (33) from (32) gives the ergodic capacity as

$$\begin{aligned} C &= \mathbb{E} \left[ \log_2 \det \left( \mathbf{I}_N + f_1 \mathbf{H}_2 \mathbf{H}_1 \mathbf{H}_1^H \mathbf{H}_2^H (\mathbf{I}_N + f_3 \mathbf{H}_2 \mathbf{H}_2^H)^{-1} \right) \right] \\ &\quad - \mathbb{E} \left[ \log_2 \det \left( \mathbf{I}_N + f_2 \mathbf{H}_2 \mathbf{H}_1 \mathbf{H}_1^H \mathbf{H}_2^H (\mathbf{I}_N + f_3 \mathbf{H}_2 \mathbf{H}_2^H)^{-1} \right) \right] \\ &= \tilde{C}_1 - \tilde{C}_2, \end{aligned} \quad (34)$$

where we have defined

$$\tilde{C}_i \triangleq \mathbb{E} \left[ \log_2 \det \left( \mathbf{I}_N + f_i \mathbf{H}_2 \mathbf{H}_1 \mathbf{H}_1^H \mathbf{H}_2^H (\mathbf{I}_N + f_3 \mathbf{H}_2 \mathbf{H}_2^H)^{-1} \right) \right] \quad (35)$$

because it will be used often throughout the proofs. Fortunately, each term of (34) is similar to [26, Eq. 2], i.e., it can be expressed by a very concise form as

$$\tilde{C}_i = \mathbb{E} \left[ \log_2 \det \left( \mathbf{I}_K + f_i \tilde{\mathbf{H}}_1 \mathbf{L} \tilde{\mathbf{H}}_1^H \right) \right], \quad (36)$$

where  $\mathbf{L} = \text{diag} \left\{ \frac{\lambda_i^2}{1+f_3 \lambda_i^2} \right\}_{i=1}^q$  and  $\tilde{\mathbf{H}}_1 \sim \mathcal{CN}(\mathbf{0}, \mathbf{I}_K \otimes \mathbf{I}_q)$ . To this end,  $C$  can be finally derived by expressing  $\tilde{C}_i$  in (34) in terms of the real non-negative eigenvalues of  $\mathbf{Z} = \tilde{\mathbf{H}}_1 \mathbf{L} \tilde{\mathbf{H}}_1^H$ , since it is a  $K \times q$  random non-negative definite matrix following the pdf given by Lemma 1 with  $\alpha = f_3$ . ■

## APPENDIX C PROOF OF THEOREM 2

The main targets are to derive the first and second derivatives of (12), or equivalently of  $\tilde{C}_i$ , as can be seen by (34). When  $\rho \rightarrow 0$ , and  $\alpha$  is fixed, we find that  $f_1(0) = f_2(0) = 0$ , while their first and second derivatives at  $\rho = 0$  equal to  $f'_1(0) = \frac{\alpha \tilde{\delta}_{t_1}^2}{KM \tilde{\delta}_{r_2}^2}$ ,  $f'_2(0) = \frac{\alpha \tilde{\delta}_{t_1}^2}{KM \tilde{\delta}_{r_2}^2}$ , and  $f''_1(0) = -\frac{2\alpha \tilde{\delta}_{t_1}^2 \tilde{\delta}_{t_1}^2}{KM \tilde{\delta}_{r_2}^2}$ ,  $f''_2(0) = -\frac{2\alpha \tilde{\delta}_{t_1}^2 \tilde{\delta}_{r_1}^2}{KM \tilde{\delta}_{r_2}^2}$ . Also,  $\mathbf{L}(0) = \text{diag} \left\{ \frac{\lambda_i^2}{1+f_3(0)(\rho)\lambda_i^2} \right\}_{i=1}^q$  with  $f_3(0) = \frac{\tilde{\delta}_{t_2}^2 \alpha}{M \tilde{\delta}_{r_2}^2}$ . Thus, we have  $\mathbf{G}(0) = \mathbf{I}_N$ . Given that  $\tilde{C}_i$  can be written as in (36), we take the first derivative with respect to  $\rho$ , and we have

$$\begin{aligned} \dot{\tilde{C}}_i(0) &= s \int_0^\infty (\log_2 (1 + f_i(\rho)) p_\lambda(\lambda))' \Big|_{\rho=0} d\lambda \\ &= \frac{s}{\ln 2} f'_i(0) \int_0^\infty \lambda p_\lambda(\lambda) \Big|_{\rho=0} d\lambda \end{aligned} \quad (37)$$

$$\begin{aligned} &= \frac{s}{\ln 2} f'_i(0) \mathbb{E}[\lambda] \Big|_{\rho=0} \\ &= f'_i(0) \frac{\mathbb{E} \left[ \text{tr} \left( \tilde{\mathbf{H}}_1 \mathbf{L}(0) \tilde{\mathbf{H}}_1^H \right) \right]}{\ln 2}, \end{aligned} \quad (38)$$

where (37) is obtained by making several algebraic manipulations after taking into account that  $f_i(0) = 0$ . Note that  $\mathbb{E}[\lambda] \Big|_{\rho=0}$ , given by Lemma 2, is the mean eigenvalue of  $\tilde{\mathbf{H}}_1 \mathbf{L}(\rho) \tilde{\mathbf{H}}_1^H$  at  $\rho = 0$ . ■

**Lemma 2:** The  $n$ th moment of the unordered eigenvalue of  $\tilde{\mathbf{H}}_1 \mathbf{L}(\rho) \tilde{\mathbf{H}}_1^H$  is given by

$$\mathbb{E}(\lambda^n) = \tilde{\mathcal{A}} a^{-\frac{2k+2l+2n+u+i-2q-1}{2}} e^{\frac{1}{2a}} W_{-\frac{2t+2n+u-i+1}{2}, \frac{v-i}{2}} \left( \frac{1}{a} \right), \quad (39)$$

where  $\tilde{\mathcal{A}} = \frac{2\mathcal{K}}{s} \sum_{l=1}^q \sum_{k=q-s+1}^q \sum_{i=0}^{\tilde{q}-l} \frac{(\tilde{q}-l) \Gamma(t+p+n-i-1) \Gamma(t-q+n)}{\Gamma(K-q+k)}$   $G_{l,k}$ . Note that we have defined  $t = K + k$ .

*Proof:* The calculation is straightforward after applying [32, eq. 9.220.3]. ■

As far as the second derivative of  $\tilde{C}_i$  is concerned, we have

$$\begin{aligned} \ddot{\tilde{C}}_i(0) &= s \int_0^\infty (\log_2 (1 + f_i(\rho)) p_\lambda(\lambda))'' \Big|_{\rho=0} d\lambda \\ &= \frac{s}{\ln 2} \left( \int_0^\infty \left( f''_i(\rho) \lambda - (f'_i(\rho))^2 \lambda^2 \right) p_\lambda(\lambda) \Big|_{\rho=0} d\lambda \right. \\ &\quad \left. + 2 \int_0^\infty f'_i(\rho) (\lambda p_\lambda(\lambda))' \Big|_{\rho=0} d\lambda \right) \end{aligned} \quad (40)$$

$$\begin{aligned} &= \frac{s}{\ln 2} \left( \left( f''_i(0) \mathbb{E}[\lambda] \Big|_{\rho=0} - (f'_i(0))^2 \mathbb{E}[\lambda^2] \Big|_{\rho=0} \right) \right. \\ &\quad \left. + 2f'_i(0) \mathbb{E}'[\lambda] \Big|_{\rho=0} \right), \end{aligned} \quad (41)$$

where (40) is obtained after certain manipulations as in (37). Special focus must be given in the derivation of  $\mathbb{E}'[\lambda] \Big|_{\rho=0}$ , which is basically the derivative of the mean eigenvalue at  $\rho = 0$ . Taking a closer look at (39), it consists of four terms depending on  $\rho$ . Thus, we can rewrite (39) as  $\mathbb{E}(\lambda) = \mathcal{I}_1 \mathcal{I}_2 \mathcal{I}_3 \mathcal{I}_4$  with  $\mathcal{I}_1 = \tilde{\mathcal{A}}$ ,  $\mathcal{I}_2 = a^{-\frac{u+2k+2l+i-2q+1}{2}}$ ,  $\mathcal{I}_3 = e^{\frac{1}{2a}}$ , and  $\mathcal{I}_4 = W_{-\frac{2t+u-i+1}{2}, \frac{v-i}{2}} \left( \frac{1}{a} \right)$ . Calculation of the derivatives of  $\mathcal{I}_2$  and  $\mathcal{I}_3$  are straightforward. Similarly, the derivative of  $\mathcal{I}_4$  demands indirectly the derivative of the Whittaker function given by [33, Eq. (07.45.20.0005.01)]. Taking this into account,  $\mathcal{I}_4$  is obtained as

$$\begin{aligned} \mathcal{I}'_4 &= \frac{1}{f_3^2(0)} \left[ \left( \frac{v-i}{2} f_3(0) - \frac{1}{2} \right) W_{-\frac{2t+u-i+1}{2}, \frac{v-i}{2}} \left( \frac{1}{f_3(0)} \right) \right. \\ &\quad \left. + f_3(0) W_{-\frac{2t+u-i-1}{2}, \frac{v-i}{2}} \left( \frac{1}{f_3(0)} \right) \right] \end{aligned} \quad (42)$$

The difficulty arises during the calculation of the derivative of  $\mathcal{I}_1$  because the cofactor  $G_{l,k}$  depends on  $\rho$ . Hence, the calculation of the derivative of the cofactor of a non-singular matrix  $\mathbf{B}$ , presented by the following lemma, is the first step.

**Lemma 3:** Let a nonsingular matrix  $\mathbf{B}$  with  $\text{adj}(\mathbf{B})$  and  $\det(\mathbf{B})$  denoting its adjugate and determinant. Given that the cofactor  $\mathbf{C}$  of  $\mathbf{B}$  is related to its adjugate according to  $\mathbf{C}^T = \text{adj}(\mathbf{B})$ , its derivative of the cofactor  $\mathbf{C}$  is given by

$$\frac{\partial \mathbf{C}^T}{\partial u} = \frac{\text{tr}(\text{adj}(\mathbf{B}) \frac{\partial \mathbf{B}}{\partial u}) \text{adj}(\mathbf{B}) - \text{adj}(\mathbf{B}) \frac{\partial \mathbf{B}}{\partial u} \text{adj}(\mathbf{B})}{\det(\mathbf{B})}. \quad (43)$$

*Proof:* Having in mind the basic property between the adjugate of a matrix and its inverse ( $\mathbf{B}^{-1} = \frac{\text{adj}(\mathbf{B})}{\det(\mathbf{B})}$ ), we have

$$\mathbf{C}^T = \text{adj}(\mathbf{B}) = \det(\mathbf{B}) \mathbf{B}^{-1}. \quad (44)$$

Taking the differential of (44), we get

$$d\mathbf{C}^T = \det(\mathbf{B}) \mathbf{B}^{-1} + \det(\mathbf{B}) d(\mathbf{B}^{-1}) \quad (45)$$

$$= \text{tr}(\text{adj}(\mathbf{B}) d\mathbf{B}) \frac{\text{adj}(\mathbf{B})}{\det(\mathbf{B})} - \text{adj}(\mathbf{B}) d\mathbf{B} \frac{\text{adj}(\mathbf{B})}{\det(\mathbf{B})} \quad (46)$$

where in (45) we have used the Jacobi's formula expression<sup>8</sup> as well as the differential of the inverse of a matrix  $\mathbf{B}$ , which can be written as [40, Eq. 8]

$$d(\mathbf{B}^{-1}) = -\mathbf{B}^{-1}d\mathbf{B}\mathbf{B}^{-1}. \quad (47)$$

Thus, the proof is concluded.  $\blacksquare$

Use of Lemma 3 allows to obtain  $\frac{\partial G_{l,k}^T}{\partial \rho}$ . However, we still need the derivative of the matrix  $\mathbf{G}$  whose elements are given by (31). Specifically, we have that if  $\frac{\partial \mathbf{G}^T}{\partial \rho}$  expresses the derivative of a matrix  $\mathbf{G}$ , its elements are given by

$$\begin{aligned} \left[ \frac{\partial \mathbf{G}^T}{\partial \rho} \right]_{m,n} &= \dot{f}_3(0) (u - m - n) f_3(0)^{-u-m-n=1} \\ &\quad \times \Gamma(u + m + n) \left( \text{U} \left( u + m + n, v + 1, \frac{1}{f_3(0)} \right) \right. \\ &\quad \left. - \frac{1}{f_3(0)} \text{U} \left( u + m + n + 1, v + 2, \frac{1}{f_3(0)} \right) \right). \end{aligned} \quad (48)$$

where we have used [33, Eq. (07.33.20.0005.01)] that provides the derivative of the Tricomi confluent hypergeometric function as  $\frac{\partial \text{U}(a,b,z)}{\partial \rho} = -a \text{U}(a+1, b+1, z)$ . Having now obtained everything necessary to calculate  $\mathcal{I}'_1$ ,  $\tilde{C}_i(0)$  is derived since  $\mathbb{E}'[\lambda] \Big|_{\rho=0}$  can be calculated by means of straightforward substitutions. The proof is concluded after substitutions of the derived  $\dot{C}_i(0)$  and  $\tilde{C}_i(0)$  to (20) and (21), and making necessary algebraic manipulations.

#### APPENDIX D PROOF OF THEOREM 3

Taking the general form of  $\tilde{C}_i$  from (34), we present its upper and lower bounds,  $\tilde{C}_{U,i}$  and  $\tilde{C}_{L,i}$ , respectively. Both bounds are obtained by applying the necessary changes to [26, Theorems 5 and 6]. More concretely, the upper bound is

$$\tilde{C}_i(\rho) \leq \tilde{C}_{U,i}(\rho) = \log_2(\text{Kdet}(\mathbf{\Xi}_i)), \quad (49)$$

where  $\mathbf{\Xi}_i$  is a  $q \times q$  matrix with elements given by (50), with  $\tau = u + m + n - 1$ , and  $\vartheta_\tau(B) = \Gamma(\tau) \text{U}(\tau, v + 1, \frac{1}{B})$ .

Regarding the lower bound, [26, Theorems 6] enables us to write

$$\begin{aligned} \tilde{C}_i(\rho) &\geq \tilde{C}_{L,i}(\rho) \\ &= s \log_2 \left( 1 + f_i(\rho) \exp \left( \frac{1}{s} \left[ \sum_{k=1}^s \psi(N-s+k) + K \sum_{k=q-s+1}^q \det(W_k) \right] \right) \right), \end{aligned} \quad (51)$$

where  $\mathbf{W}_k$  is a  $q \times q$  matrix whose  $(m, n)$ -th element is given by

$$\{\mathbf{W}_k\}_{m,n} = \begin{cases} B^{1-\tau} \vartheta_{\tau-1}(B), & n \neq k \\ \zeta_{m+n}(B), & n = k \end{cases} \quad (52)$$

and the fact that  $\zeta_t(B) = \sum_{i=0}^{2q-t} B^{2q-t-i} \Gamma(v-i) \binom{2q-t}{i} (\psi(v-i) - \sum_{l=0}^{v-i-1} g_l(\frac{1}{B}))$  with  $\tau$  and  $\vartheta_\tau(\cdot)$  given

<sup>8</sup>Jacobi's formula expresses the differential of the determinant of a matrix  $\mathbf{B}$  in terms of the adjugate of  $\mathbf{B}$  and the differential of  $\mathbf{B}$  as  $d\mathbf{B} = \text{tr}(\text{adj}(\mathbf{B}) d\mathbf{B})$ .

as above, while  $g_l(x) = e^x \text{E}_{l+1}(x)$ . Finally, the upper and lower bounds of  $\mathbf{C}$  are obtained by means of a combination of (49) and (51).

#### APPENDIX E PROOF OF THEOREM 4

The asymptotic limits of the capacity terms (15) and (16), when the channel dimensions tend to infinity while keeping their finite ratios  $\beta = \frac{K}{M}$ ,  $\gamma = \frac{N}{M}$  fixed, are expressed in terms of a generic expression as

$$\begin{aligned} \mathcal{C}_i &= \frac{1}{N} \lim_{K,M,N \rightarrow \infty} \mathbb{E}[\ln \det(\mathbf{I}_M + f_3 \mathbf{H}_2^H \mathbf{H}_2 (\mathbf{I}_M + \alpha \mathbf{H}_1 \mathbf{H}_1^H))] \\ &= \frac{M}{N} \lim_{K,M,N \rightarrow \infty} \mathbb{E} \left[ \frac{1}{M} \sum_{i=1}^M \ln \left( 1 + \tilde{f}_3 \lambda_i \left( \frac{1}{M} \mathbf{K}_\alpha \right) \right) \right] \\ &\rightarrow \frac{1}{\gamma} \int_0^\infty \ln(1 + \tilde{f}_3 x) f_{\mathbf{K}_\alpha/M}^\infty(x) dx, \end{aligned} \quad (53)$$

where  $\mathcal{C}_i$  corresponds to  $\mathcal{C}_1$  or  $\mathcal{C}_2$  depending on the value of  $i$ , i.e., if  $\alpha = f_1$  or if  $\alpha = f_2/f_3$ , respectively. Note that  $\tilde{f}_3 = f_3 M = \frac{\alpha(1+\tilde{\delta}_{r_1}^2 \rho + \tilde{\delta}_{t_2}^2 (\tilde{\delta}_{tr_1}^2) \rho)}{\tilde{\delta}_{r_2}^2 (1+\tilde{\delta}_{tr_1}^2) \rho}$ . In addition,  $\lambda_i(\mathbf{X})$  is the  $i$ th ordered eigenvalue of matrix  $\mathbf{X}$ , and  $f_{\mathbf{X}}^\infty$  denotes the a.e.p.d.f. of  $\mathbf{X}$ . Moreover, for the sake of simplification of our analysis, we have made use of certain variable definitions similar to [38]. In particular, we have  $\tilde{\mathbf{M}}_\alpha = \mathbf{I}_M + \alpha \mathbf{H}_1 \mathbf{H}_1^H$ ,  $\tilde{\mathbf{N}}_1 = \mathbf{H}_1 \mathbf{H}_1^H$ ,  $\tilde{\mathbf{N}}_2 = \mathbf{H}_2^H \mathbf{H}_2$ , and  $\mathbf{K}_\alpha = \mathbf{H}_2^H \mathbf{H}_2 (\mathbf{I}_M + \alpha \mathbf{H}_1 \mathbf{H}_1^H) = \tilde{\mathbf{N}}_2 \tilde{\mathbf{M}}_\alpha$ .

The analysis behind the derivation of the a.e.p.d.f. of  $\mathbf{K}_\alpha/M$ , which leads asymptotically to a deterministic function by applying principles of free probability theory [31], is provided in [1]. Especially, we use the free multiplicative convolution, in order to obtain the a.e.p.d.f. of the product of two matrices as in [38], [39].

#### APPENDIX F PROOF OF ASYMPTOTIC BOUNDS

Let us define  $F = \tilde{\delta}_{r_2}^2 \left( 1 + \tilde{\delta}_{tr_1}^2 \rho \right)$ , then  $f_1 = \frac{\alpha \rho \tilde{\delta}_{t_1}^2}{K M F} = \frac{\tilde{f}_1}{K M F}$ ,  $f_2 = \frac{\alpha \rho \tilde{\delta}_{t_1}^2}{K M F} = \frac{\tilde{f}_2}{K M F}$ , and  $f_3 = \frac{\mathcal{B}}{M F}$  with  $\mathcal{B} = \alpha \left( 1 + \tilde{\delta}_{r_1}^2 \rho + \tilde{\delta}_{t_2}^2 \left( 1 + \tilde{\delta}_{tr_1}^2 \rho \right) \right)$ .

##### A. Proof of Proposition 2

When the number of users increases infinitely ( $K \rightarrow \infty$ ),  $\tilde{C}_i$ , given by (36), can be expressed as

$$\tilde{C}_i = \mathbb{E} \left[ \log_2 \det \left( \mathbf{I}_q + f_i \mathbf{H}_1^H \tilde{\mathbf{H}}_1 \mathbf{L} \right) \right]. \quad (54)$$

The Law of Large Numbers (LLN) provides that  $\lim_{K \rightarrow \infty} \frac{\tilde{\mathbf{H}}_1 \tilde{\mathbf{H}}_1^H}{K} \rightarrow \mathbf{I}_q$ . Hence, (54) becomes

$$\lim_{K \rightarrow \infty} \tilde{C}_i = \mathbb{E} \left[ \log_2 \det \left( \mathbf{I}_q + f_i \mathbf{L} \right) \right], \quad (55)$$

which after substituting  $\mathbf{L}$  and making certain algebraic manipulations leads to

$$\begin{aligned} \lim_{K \rightarrow \infty} \tilde{C}_i &= \mathbb{E} \left[ \log_2 \det \left( \mathbf{I}_q + \frac{\tilde{f}_i + \mathcal{B}}{MF} \mathbf{H}_2 \mathbf{H}_2^H \right) \right] \\ &\quad - \mathbb{E} \left[ \log_2 \det \left( \mathbf{I}_q + \frac{\mathcal{B}}{MF} \mathbf{H}_2 \mathbf{H}_2^H \right) \right]. \end{aligned} \quad (56)$$

Substitution to (34) gives the desired result.

$$\{\Xi_i\}_{m,n} = \begin{cases} B^{1-\tau} \vartheta_{\tau-1}(B), & n \leq q - N \\ B^{1-\tau} \vartheta_{\tau-1}(B) + f_i(\rho) (N - q + n) B^{-\tau} \vartheta_{\tau}(B), & n > q - N \end{cases} \quad (50)$$

### B. Proof of Proposition 3

In the case of infinite number of relay antennas ( $M \rightarrow \infty$ ), we recall the LLN, i.e., we have  $\lim_{M \rightarrow \infty} \frac{\tilde{\mathbf{H}}_2 \tilde{\mathbf{H}}_2^H}{M} \rightarrow \mathbf{I}_N$ , or equivalently,  $\lim_{M \rightarrow \infty} \frac{\lambda_i^2}{M} \rightarrow 1$ , for  $i = 1, \dots, N$  since  $q = N$ . Thus, initially  $\tilde{\mathbf{C}}_i$  can be written as

$$\tilde{\mathbf{C}}_i = \mathbb{E} \left[ \log_2 \det \left( \mathbf{I}_K + \frac{\bar{f}_i}{K F} \tilde{\mathbf{H}}_1 \tilde{\mathbf{L}} \tilde{\mathbf{H}}_1^H \right) \right], \quad (57)$$

where  $\tilde{\mathbf{L}} = \text{diag} \left\{ \frac{\lambda_i^2}{M(1+A\lambda_i^2)} \right\}_{i=1}^N$ . As a result, we have

$$\lim_{M \rightarrow \infty} \tilde{\mathbf{C}}_i = \mathbb{E} \left[ \log_2 \det \left( \mathbf{I}_K + \frac{\bar{f}_i}{K(F+B)} \tilde{\mathbf{H}}_1 \tilde{\mathbf{H}}_1^H \right) \right]. \quad (58)$$

The desired result is obtained by means of (34).

### C. Proof of Proposition 4

By increasing the number of BS antennas  $N$  infinitely, we obtain that  $\lambda_i^2 \rightarrow \infty$ . Consequently, the diagonal matrix  $\mathbf{L}$  becomes a scaled identity matrix equal to  $f_3 \mathbf{I}_M$ , since  $q = M$ . Thus,  $\tilde{\mathbf{C}}_i$  reads as

$$\tilde{\mathbf{C}}_i = \mathbb{E} \left[ \log_2 \det \left( \mathbf{I}_K + \frac{f_i}{f_3} \tilde{\mathbf{H}}_1^H \tilde{\mathbf{H}}_1 \right) \right]. \quad (59)$$

The desired result is yielded by a straightforward substitution to (34).

## REFERENCES

- [1] A. K. Papazafeiropoulos, S. K. Sharma, and S. Chatzinotas, "Impact of transceiver impairments on the capacity of dual-hop relay massive MIMO systems," in *Proc. of IEEE Global Communications Conference (GLOBECOM 2015) - Workshop on Massive MIMO: From theory to practice*, 2015.
- [2] H. Holma and A. Toskala, *LTE for UMTS: Evolution to LTE-Advanced*, Wiley, Ed., 2011.
- [3] E. Telatar, "Capacity of multi-antenna gaussian channels," *Europ. Trans. on Telecom.*, vol. 10, no. 6, pp. 585–595, 1999.
- [4] G. J. Foschini and M. J. Gans, "On limits of wireless communications in a fading environment when using multiple antennas," *Wireless Pers. Commun.*, vol. 6, no. 3, pp. 311–335, 1998.
- [5] T. Marzetta, "Noncooperative cellular wireless with unlimited numbers of base station antennas," *IEEE Trans. Wireless Commun.*, vol. 9, no. 11, pp. 3590–3600, November 2010.
- [6] F. Rusek, D. Persson, B. K. Lau, E. Larsson, T. Marzetta, O. Edfors, and F. Tufvesson, "Scaling up MIMO: Opportunities and challenges with very large arrays," *IEEE Signal Processing Mag.*, vol. 30, no. 1, pp. 40–60, Jan 2013.
- [7] H. Q. Ngo, E. Larsson, and T. Marzetta, "Energy and spectral efficiency of very large multiuser MIMO systems," *IEEE Trans. Commun.*, vol. 61, no. 4, pp. 1436–1449, April 2013.
- [8] J. Qi and S. Aissa, "Analysis and compensation of I/Q imbalance in MIMO transmit-receive diversity systems," *IEEE Trans. Commun.*, vol. 58, no. 5, pp. 1546–1556, 2010.
- [9] ———, "On the power amplifier nonlinearity in MIMO transmit beamforming systems," *IEEE Trans. Commun.*, vol. 60, no. 3, pp. 876–887, 2012.
- [10] H. Mehrpouyan, A. Nasir, S. Blostein, T. Eriksson, G. Karagiannidis, and T. Svensson, "Joint estimation of channel and oscillator phase noise in MIMO systems," *IEEE Trans. Signal Processing*, vol. 60, no. 9, pp. 4790–4807, Sept 2012.
- [11] X. Zhang, M. Matthaiou, E. Björnson, M. Coldrey, and M. Debbah, "On the MIMO capacity with residual transceiver hardware impairments," in *Proc. IEEE Int. Conf. Commun.*, IEEE, 2014, pp. 5299–5305.
- [12] E. Björnson, J. Hoydis, M. Kountouris, and M. Debbah, "Massive MIMO systems with non-ideal hardware: Energy efficiency, estimation, and capacity limits," *IEEE Trans. Inform. Theory*, vol. 60, no. 11, pp. 7112–7139, Nov 2014.
- [13] E. Björnson, M. Matthaiou, and M. Debbah, "Massive MIMO with non-ideal arbitrary arrays: Hardware scaling laws and circuit-aware design," *IEEE Trans. Wireless Commun.*, vol. 14, no. no.8, pp. 4353–4368, Aug. 2015.
- [14] T. Schenk, *RF imperfections in high-rate wireless systems: impact and digital compensation*, Springer Science & Business Media, 2008.
- [15] C. Studer, M. Wenk, and A. Burg, "MIMO transmission with residual transmit-RF impairments," in *ITG/IEEE Work. Smart Ant. (WSA)*, IEEE, 2010, pp. 189–196.
- [16] B. Goransson, S. Grant, E. Larsson, and Z. Feng, "Effect of transmitter and receiver impairments on the performance of MIMO in HSDPA," in *IEEE 9th Int. Workshop Signal Process. Adv. Wireless Commun. (SPAWC)*, IEEE, 2008, pp. 496–500.
- [17] E. Björnson, P. Zetterberg, and M. Bengtsson, "Optimal coordinated beamforming in the multicell downlink with transceiver impairments," in *IEEE Global Commun. Conf. (GLOBECOM)*, 2012, Dec 2012, pp. 4775–4780.
- [18] E. Björnson, P. Zetterberg, M. Bengtsson, and B. Ottersten, "Capacity limits and multiplexing gains of MIMO channels with transceiver impairments," *IEEE Commun. Lett.*, vol. 17, no. 1, pp. 91–94, 2013.
- [19] F. Athley, G. Durisi, and U. Gustavsson, "Analysis of massive MIMO with hardware impairments and different channel models," *arXiv preprint arXiv:1501.04200*, 2015.
- [20] M. Vehkaperä, T. Riihonen, M. Girnyk, E. Björnson, M. Debbah, R. Kildehøj, and R. Wichman, "Asymptotic analysis of SU-MIMO channels with transmitter noise and mismatched joint decoding," *IEEE Trans. Commun.*, vol. 63, no. 3, pp. 749–765, 2015.
- [21] J. Choi, "Downlink multiuser beamforming with compensation of channel reciprocity from RF impairments," *IEEE Trans. Commun.*, vol. 63, no. 6, pp. 2158–2169, June 2015.
- [22] E. Björnson, M. Matthaiou, and M. Debbah, "A new look at dual-hop relaying: Performance limits with hardware impairments," *IEEE Trans. Commun.*, vol. 61, no. 11, pp. 4512–4525, 2013.
- [23] Y. Yang, H. Hu, J. Xu, and G. Mao, "Relay technologies for WiMAX and LTE-advanced mobile systems," *IEEE Commun. Mag.*, vol. 47, no. 10, pp. 100–105, 2009.
- [24] M. Matthaiou, A. Papadogiannis, E. Björnson, and M. Debbah, "Two-way relaying under the presence of relay transceiver hardware impairments," *IEEE Commun. Lett.*, vol. 17, no. 6, pp. 1136–1139, June 2013.
- [25] X. Xia, D. Zhang, K. Xu, W. Ma, and Y. Xu, "Hardware impairments aware transceiver for full-duplex massive MIMO relaying," *IEEE Trans. on Signal Proc.*, vol. 63, no. 24, pp. 6565–6580, 2015.
- [26] S. Jin, M. R. McKay, C. Zhong, and K. K. Wong, "Ergodic capacity analysis of amplify-and-forward MIMO dual-hop systems," *IEEE Trans. on Inform. Theory*, vol. 56, no. 5, pp. 2204–2224, 2010.
- [27] V. Morgenstern and H. Bolcskei, "Crystallization in large wireless networks," *IEEE Trans. Inform. Theory*, vol. 53, no. 10, pp. 3319–3349, Oct 2007.
- [28] J. Wagner, B. Rankov, and A. Wittneben, "Large n analysis of amplify-and-forward MIMO relay channels with correlated rayleigh fading," *IEEE Trans. Inform. Theory*, vol. 54, no. 12, pp. 5735–5746, Dec 2008.
- [29] C.-X. Wang, F. Haider, X. Gao, X.-H. You, Y. Yang, D. Yuan, H. Aggoune, H. Haas, S. Fletcher, and E. Hepsaydir, "Cellular architecture and key technologies for 5G wireless communication networks," *IEEE Commun. Mag.*, vol. 52, no. 2, pp. 122–130, 2014.
- [30] A. Osseiran, F. Boccardi, V. Braun, K. Kusume, P. Marsch, M. Maternia, O. Qeseth, M. Schellmann, H. Schotten, H. Taoka, H. Tullberg, M. Uusitalo, B. Timus, and M. Fallgren, "Scenarios for 5G mobile and wireless communications: The vision of the METIS project," *IEEE Commun. Mag.*, vol. 52, no. 5, pp. 26–35, May 2014.
- [31] R. Couillet and M. Debbah, *Random matrix methods for wireless communications*, Cambridge University Press, 2011.

- [32] I. S. Gradshteyn and I. M. Ryzhik, "Table of integrals, series, and products," *Alan Jeffrey and Daniel Zwillinger (eds.), Seventh edition (Feb 2007)*, vol. 885, 2007.
- [33] The Wolfram functions site. [Online]. Available: <http://functions.wolfram.com>
- [34] M. Abramowitz and I. A. Stegun, *Handbook of mathematical functions: with formulas, graphs, and mathematical tables*. Courier Corporation, 1964, no. 55.
- [35] A. K. Papazafeiropoulos, S. K. Sharma, and S. Chatzinotas, "MMSE filtering performance of DH-AF massive MIMO relay systems with residual transceiver impairments," in *Proc. of IEEE International Conference on Communications (ICC 2016), Kuala Lumpur, Malaysia, May 2016*, 2016.
- [36] R. G. Bartle, *The elements of integration and Lebesgue measure*. John Wiley & Sons, 2014.
- [37] A. Lozano, A. M. Tulino, and S. Verdú, "Multiple-antenna capacity in the low-power regime," *IEEE Trans. Inf. Theory*, vol. 49, no. 10, pp. 2527–2544, 2003.
- [38] S. Chatzinotas, "MMSE filtering performance of dual-hop amplify-and-forward multiple-access channels," *IEEE Wireless Commun. Lett.*, vol. 2, no. 1, pp. 122–125, 2013.
- [39] S. Chatzinotas and B. Ottersten, "Capacity analysis of dual-hop amplify-and-forward MIMO multiple-access channels," in *International Conference on Wireless Communications & Signal Processing (WCSP)*, Hangzhou, China, Oct 2012.
- [40] K. Petersen and M. Pedersen, "The matrix cookbook," *URL <http://www2.imm.dtu.dk/pubdb/p.php>*, vol. 3274, Nov. 2012.



**Shree Krishna Sharma (S'12-M'15)** received the M.Sc. degree in information and communication engineering from the Institute of Engineering, Pulchowk, Nepal; the M.A. degree in economics from Tribhuvan University, Nepal; the M.Res. degree in computing science from Staffordshire University, Staffordshire, U.K.; and the Ph.D. degree in Wireless Communications from University of Luxembourg, Luxembourg in 2014. Dr. Sharma worked as a Research Associate at Interdisciplinary Centre for Security, Reliability and Trust (SnT), University of

Luxembourg for two years, where he was involved in EU FP7 CoRaSat project, EU H2020 SANSA, ESA project ASPIM, as well as Luxembourgish national projects Co2Sat, and SeMIGod. He is currently working as a Postdoctoral Fellow at Western University, Canada. His research interests include Internet of Things (IoT), cognitive wireless communications, Massive MIMO, Intelligent small cells, and 5G and beyond wireless systems.

In the past, Dr. Sharma was involved with Kathmandu University, Dhulikhel, Nepal, as a Teaching Assistant, and he also worked as a Part-Time Lecturer for eight engineering colleges in Nepal. He worked in Nepal Telecom for more than four years as a Telecom Engineer in the field of information technology and telecommunication. He is the author of more than 70 technical papers in refereed international journals, scientific books, and conferences. He received an Indian Embassy Scholarship for his B.E. study, an Erasmus Mundus Scholarship for his M. Res. study, and an AFR Ph.D. grant from the National Research Fund (FNR) of Luxembourg. He received Best Paper Award in CROWNCOM 2015 conference, and for his Ph.D. thesis, he received "FNR award for outstanding PhD Thesis 2015" from FNR, Luxembourg. He is a member of IEEE and has been serving as a reviewer for several international journals and conferences; and also as a TPC member for a number of international conferences including IEEE ICC, IEEE PIMRC, IEEE Globecom, IEEE ISWCS and CROWNCOM.



**Anastasios Papazafeiropoulos** [S'06M'10] is currently a Research Fellow in IDCOM at the University of Edinburgh, U.K. He obtained the B.Sc in Physics and the M.Sc. in Electronics and Computers science both with distinction from the University of Patras, Greece in 2003 and 2005, respectively. He then received the Ph.D. degree from the same university in 2010. From November 2011 through December 2012 he was with the Institute for Digital Communications (IDCOM) at the University of Edinburgh, U.K. working as a postdoctoral Research Fellow, while

during 2012-2014 he was a Marie Curie Fellow at Imperial College London, U.K. Dr. Papazafeiropoulos has been involved in several EPSRC and EU FP7 HIATUS and HARP projects. His research interests span massive MIMO, 5G wireless networks, full-duplex radio, mmWave communications, random matrices theory, signal processing for wireless communications, hardware-constrained communications, and performance analysis of fading channels.



**Dr. Symeon Chatzinotas (S'06M'09SM'13)** is currently the Deputy Head of the SIGCOM Research Group, Interdisciplinary Centre for Security, Reliability, and Trust, University of Luxembourg, Luxembourg. In the past, he has worked on numerous R&D projects for the Institute of Informatics Telecommunications, National Center for Scientific Research Demokritos, Institute of Telematics and Informatics, Center of Research and Technology Hellas, and Mobile Communications Research Group, Center of Communication Systems Research, University of

Surrey, Surrey, U.K. He has received the M.Eng. degree in telecommunications from Aristotle University of Thessaloniki, Thessaloniki, Greece, and the M.Sc. and Ph.D. degrees in electronic engineering from the University of Surrey, Surrey, U.K., in 2003, 2006, and 2009, respectively. Dr. Chatzinotas has more than 200 publications, 1600 citations and an H-Index of 22 according to Google Scholar. He is the co-recipient of the 2014 Distinguished Contributions to Satellite Communications Award, and Satellite and Space Communications Technical Committee, IEEE Communications Society, and CROWNCOM 2015 Best Paper Award. His research interests include multiuser information theory, co-operative/cognitive communications and wireless networks optimization.



**Björn Ottesten** [S'87, M'89, SM'99, F'04] received his M.S. degree in electrical engineering and applied physics from Linköping University, Sweden, in 1986, and his Ph.D. degree in electrical engineering from Stanford University, California, in 1989. He has held research positions at the Department of Electrical Engineering, Linköping University; the Information Systems Laboratory, Stanford University; the Katholieke Universiteit Leuven, Belgium; and the University of Luxembourg. From 1996 to 1997, he was the director of research at ArrayComm Inc, a start-up in San Jose, California, based on his patented technology. In 1991, he was appointed a professor of signal processing with the Royal Institute of Technology (KTH), Stockholm, Sweden. From 1992 to 2004, he was the head of the Department for Signals, Sensors, and Systems, KTH, and from 2004 to 2008, he was the Dean of the School of Electrical Engineering, KTH. Currently, he is the director of the Interdisciplinary Centre for Security, Reliability and Trust, University of Luxembourg. As Digital Champion of Luxembourg, he acts as an adviser to the European Commission. His research interests include security and trust, reliable wireless communications, and statistical signal processing. He is a Fellow of the EURASIP and has served as a member of the IEEE Signal Processing Society Board of Governors. He has served as an Associate Editor for IEEE Transactions on Signal Processing and on the Editorial Board of IEEE Signal Processing Magazine. He is currently Editor-in-Chief of the EURASIP Signal Processing Journal and a member of the Editorial Boards of the EURASIP Journal of Applied Signal Processing and Foundations and Trends in Signal Processing. He coauthored journal papers that received the IEEE Signal Processing Society Best Paper Award in 1993, 2001, 2006, and 2013, and three IEEE conference papers receiving Best Paper Awards. He was the recipient of the IEEE Signal Processing Society Technical Achievement Award in 2011. He was a first recipient of the European Research Council Advanced Research Grant.